



BEAUFORT

0	< 1 km/h < 1 mph < 0.3 m/s		7	50 - 61 km/h 31 - 38 mph 13.9 - 17.1 m/s	
1	1.1 - 5.5 km/h 1 - 3 mph 0.3 - 1.5 m/s		8	62 - 74 km/h 39 - 46 mph 17.2 - 20.7 m/s	
2	5.6 - 11 km/h 4 - 7 mph 1.6 - 3.4 m/s		9	75 - 88 km/h 47 - 54 mph 20.8 - 24.4 m/s	
3	12 - 19 km/h 8 - 12 mph 3.5 - 5.4 m/s		10	89 - 102 km/h 55 - 63 mph 24.5 - 28.4 m/s	
4	20 - 28 km/h 13 - 17 mph 5.5 - 7.9 m/s		11	103 - 117 km/h 64 - 73 mph 28.5 - 32.6 m/s	
5	29 - 38 km/h 18 - 24 mph 8.0 - 10.7 m/s		12	≥ 118 km/h ≥ 74 mph ≥ 32.7 m/s	
6	39 - 49 km/h 25 - 30 mph 10.8 - 13.8 m/s			MAX	45 km/h 28 mph 12,5 m/s



093728









LUM00372 - B [M2-ROT05030M-EU-02]

1 - 23



M2




		<div style="border: 2px solid red; padding: 2px; display: inline-block;"> ROTO50.30 ROTO70.24 </div> 			
R	 X 4	 bar - psi	R	 X 4	 bar - psi
 R1	445/65 R22.5 169F MITAS AR-01 445/65-R22.5 MULTIMAX MP569 169J BKT	8.0 - 115 8.0 - 115			




LUM00372 - B [M2-ROTO5030M-EU-02]

3 - 24

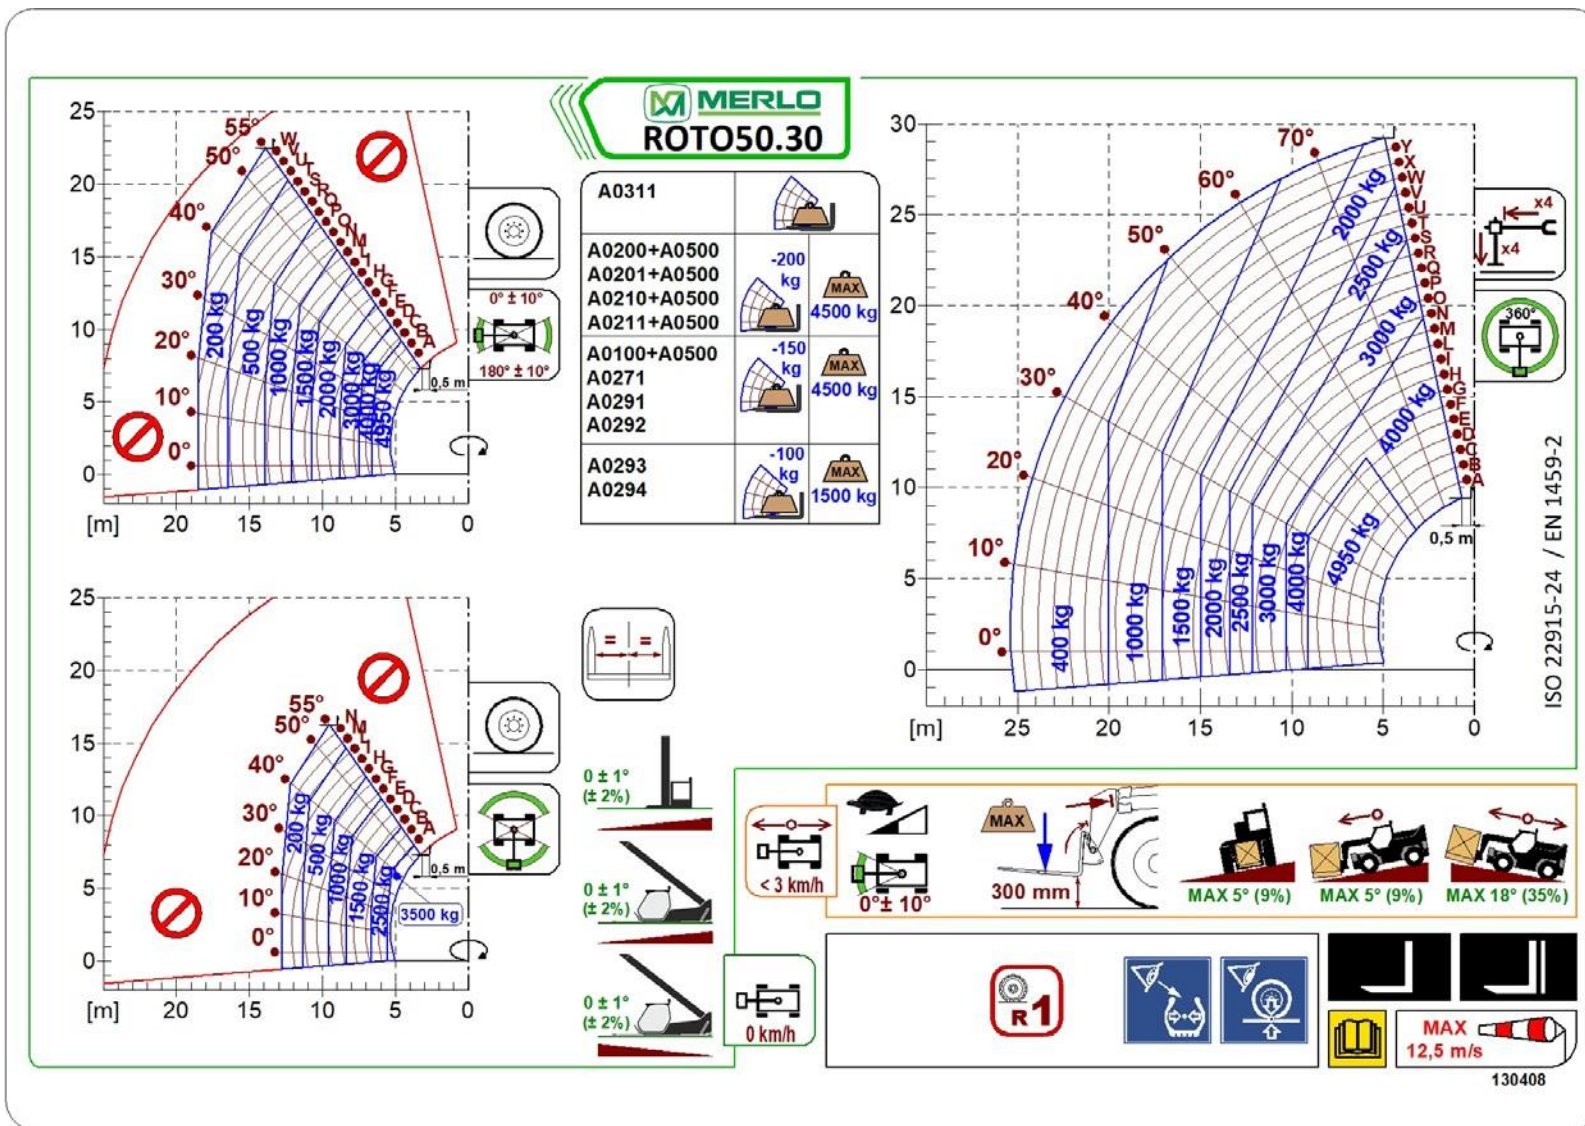


M2

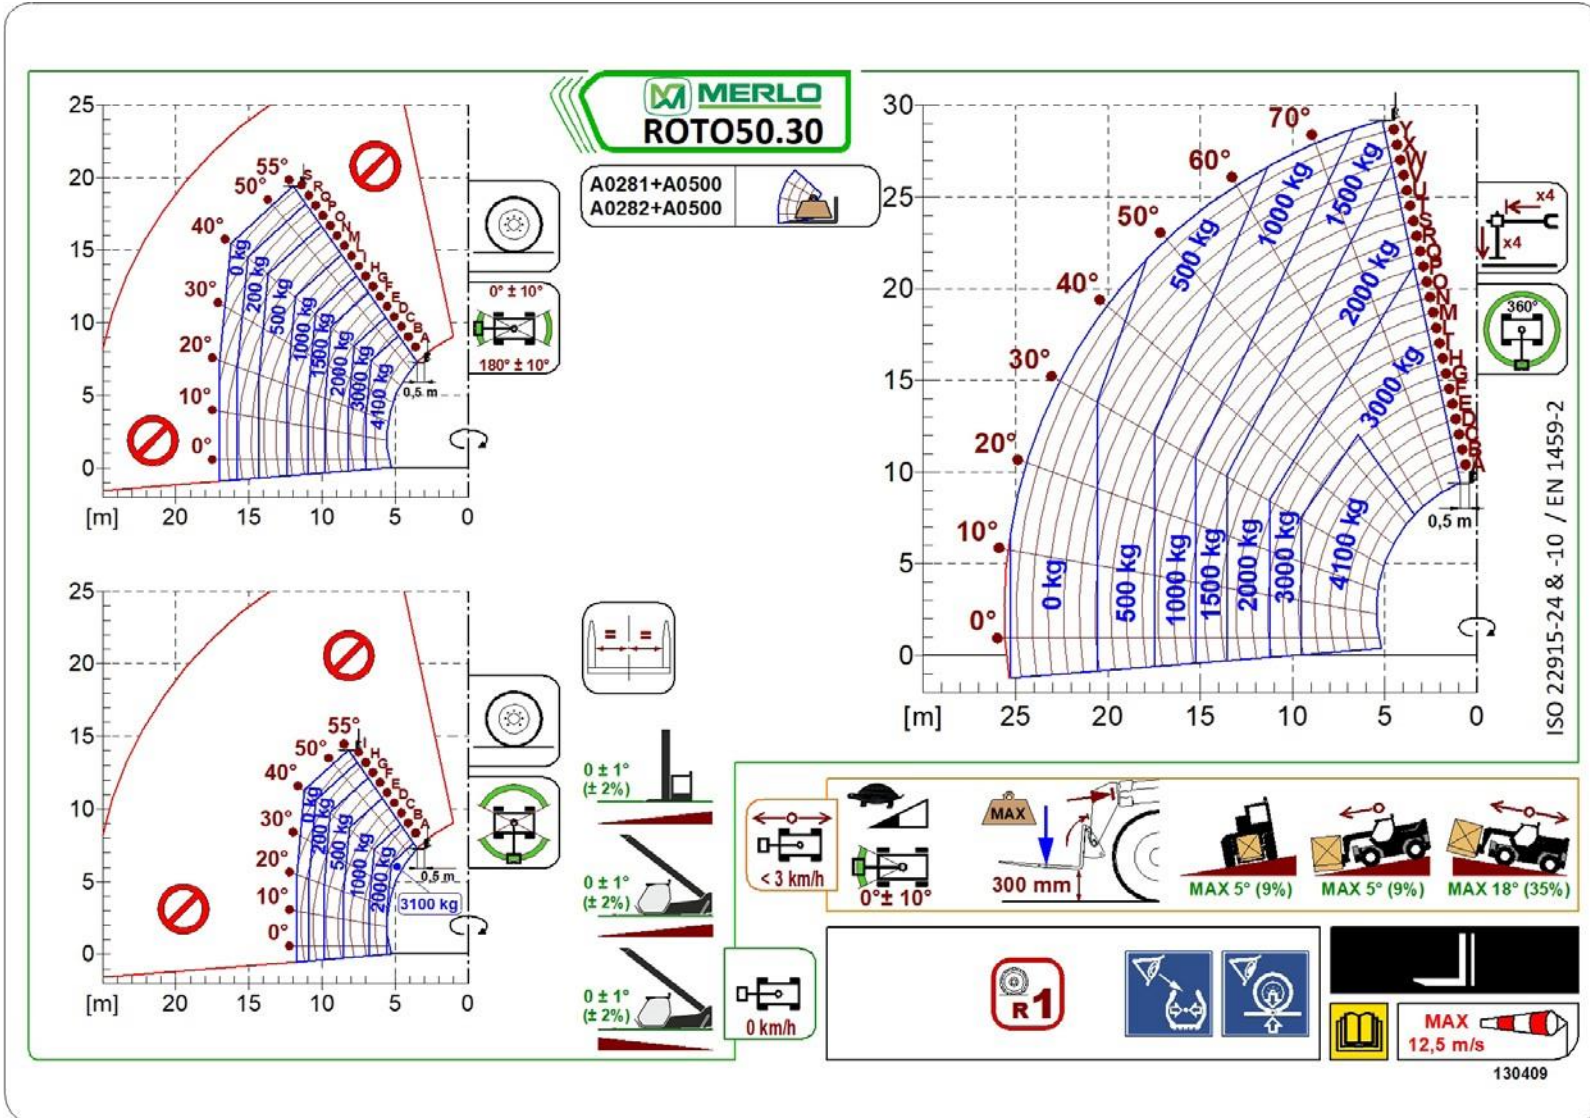


LUM00372 - B [M2-ROTO5030M-EU-02]

5 - 24

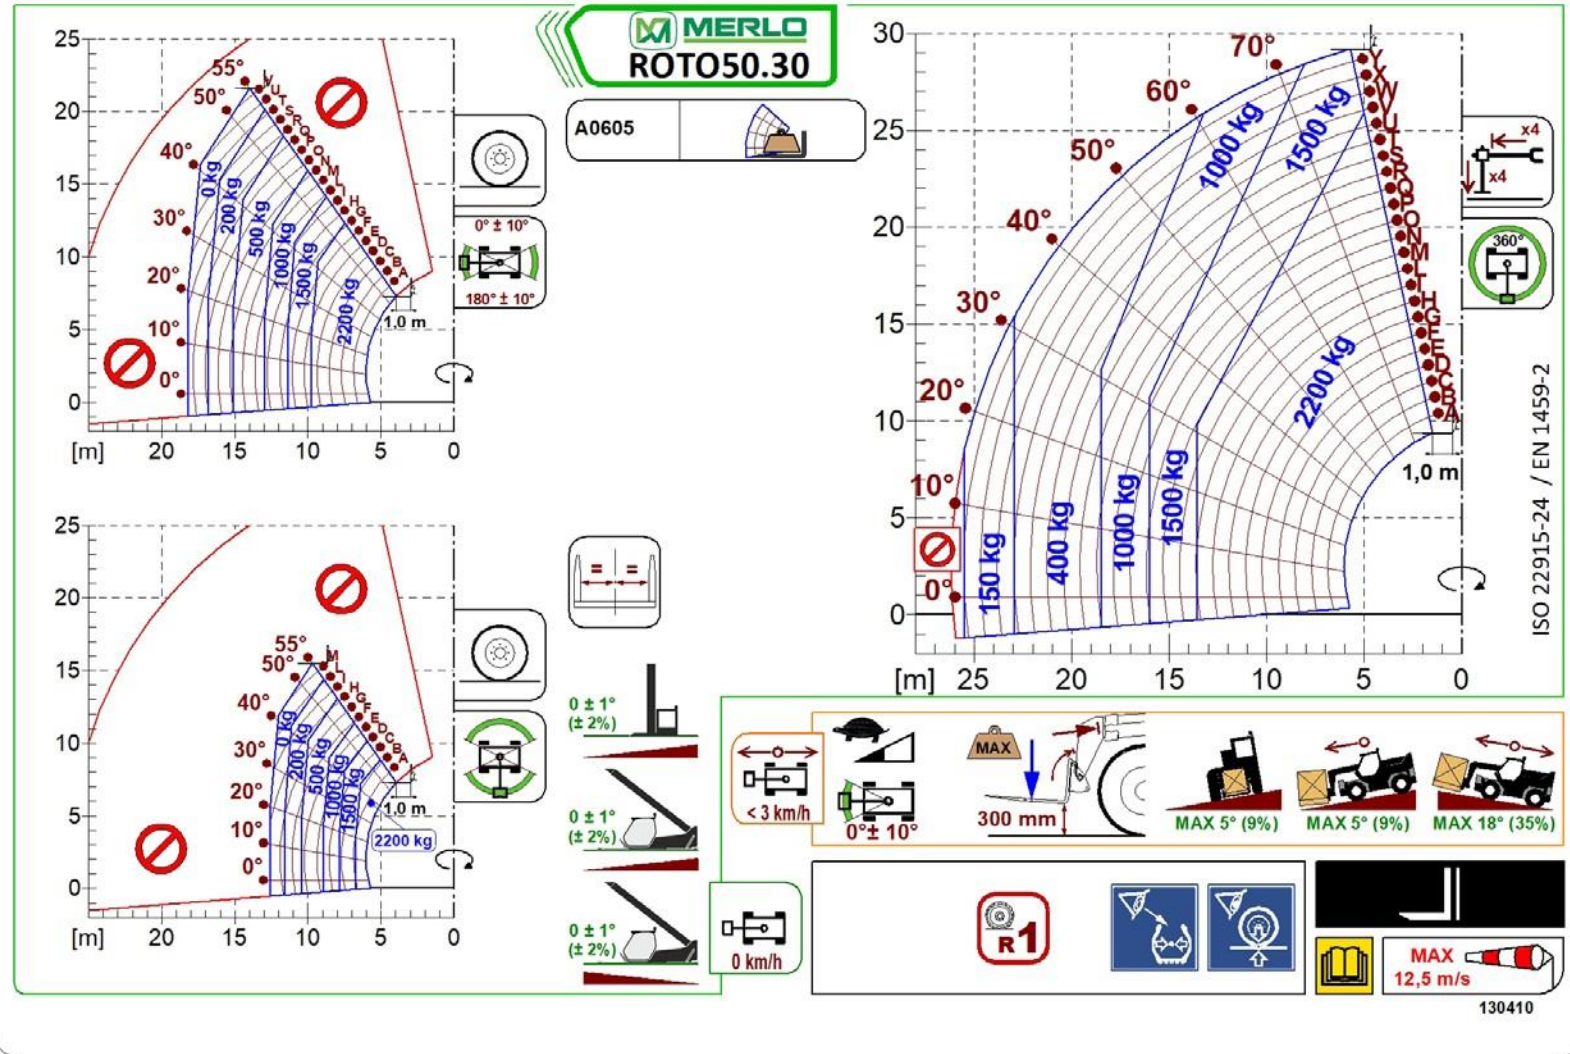


M2

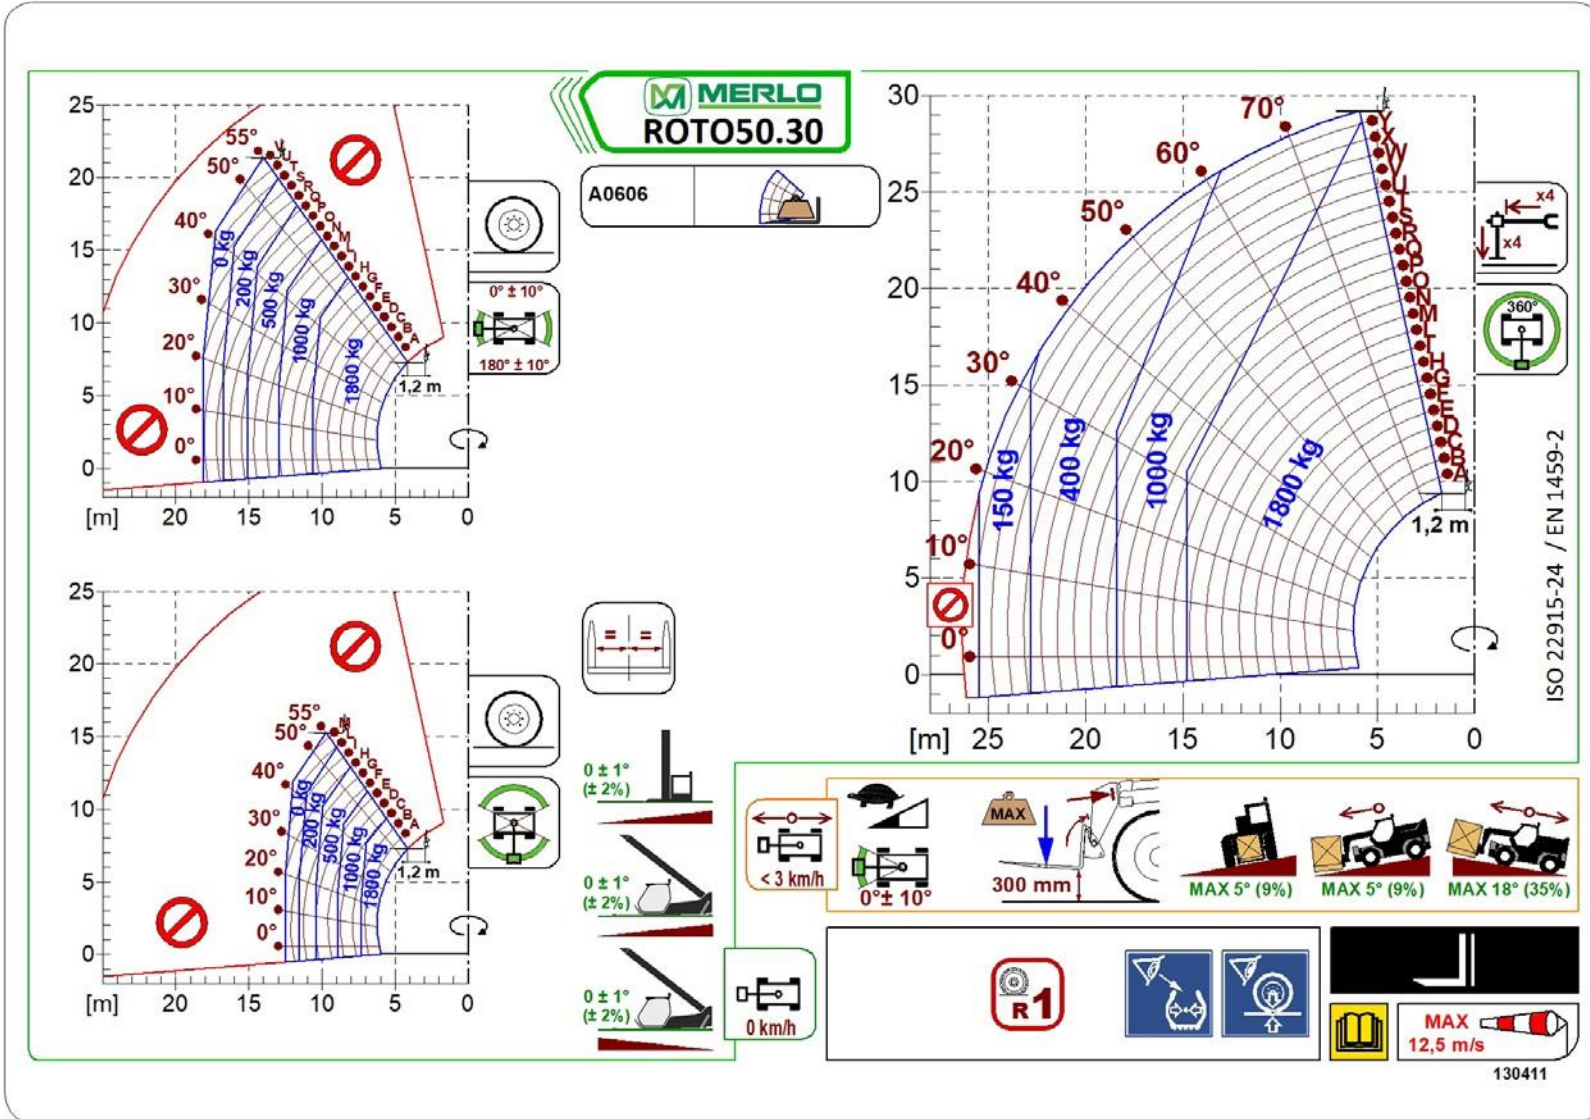


LUM00372 - B [M2-ROTO5030M-EU-02]

7 - 24

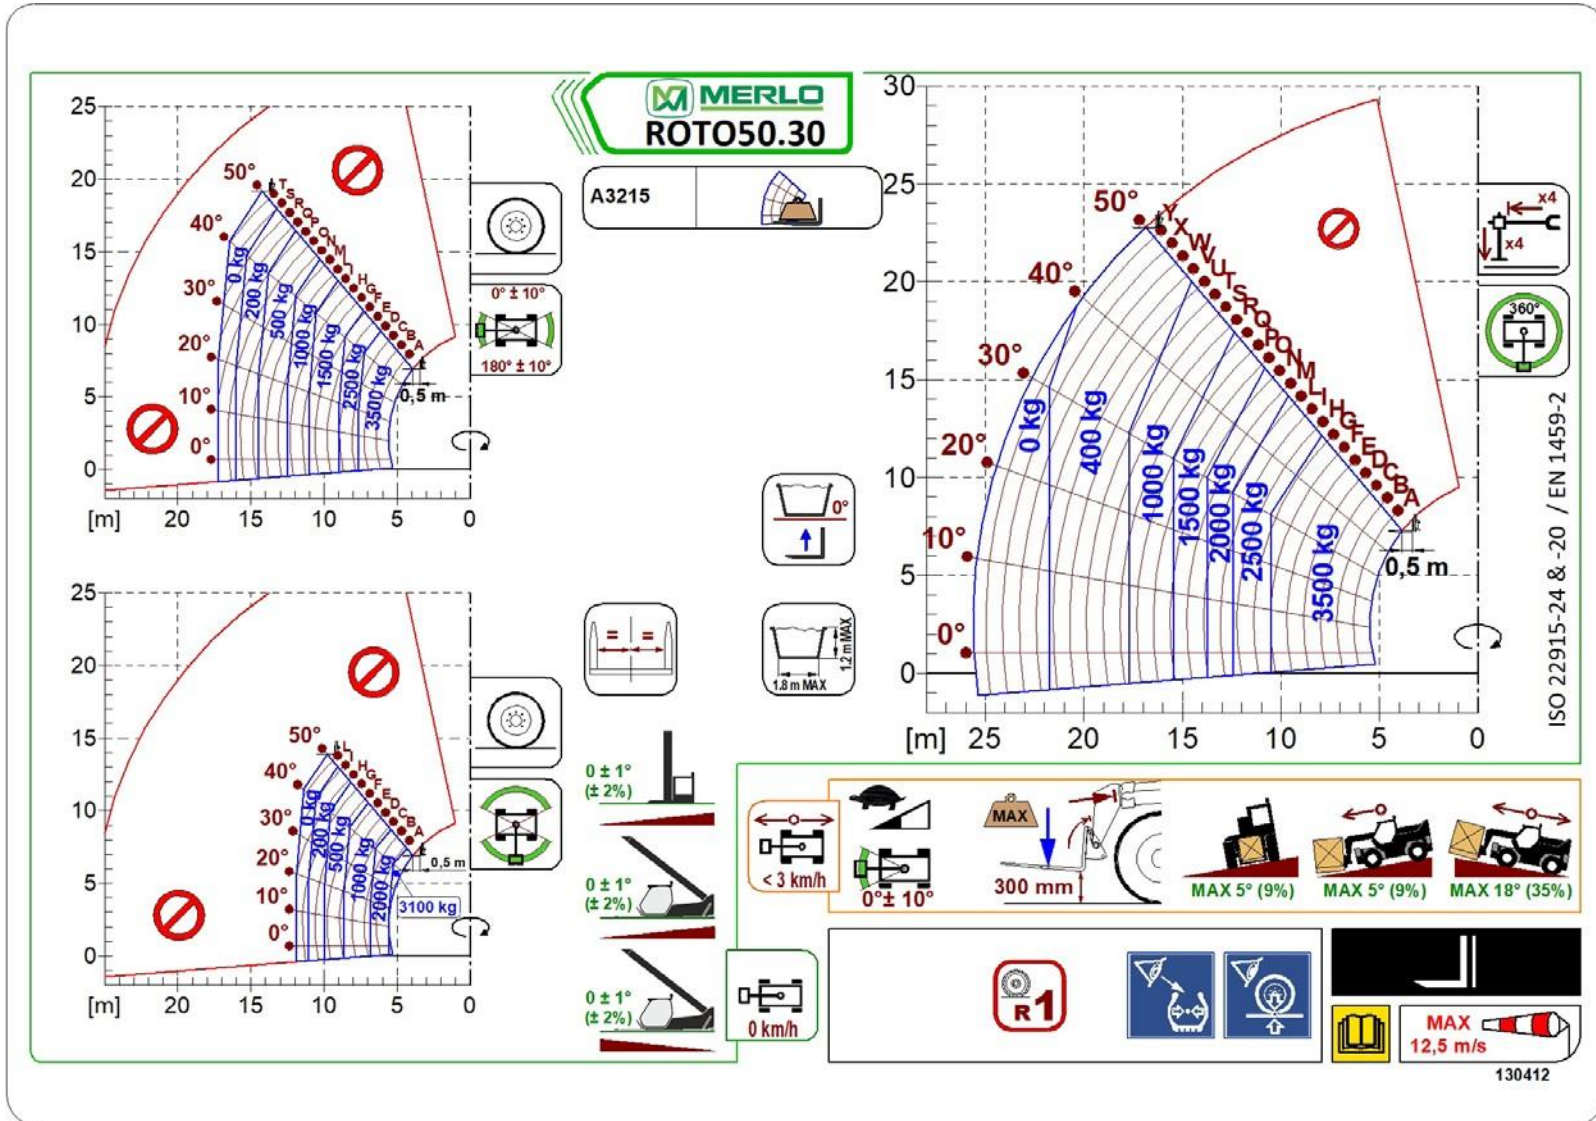


M2

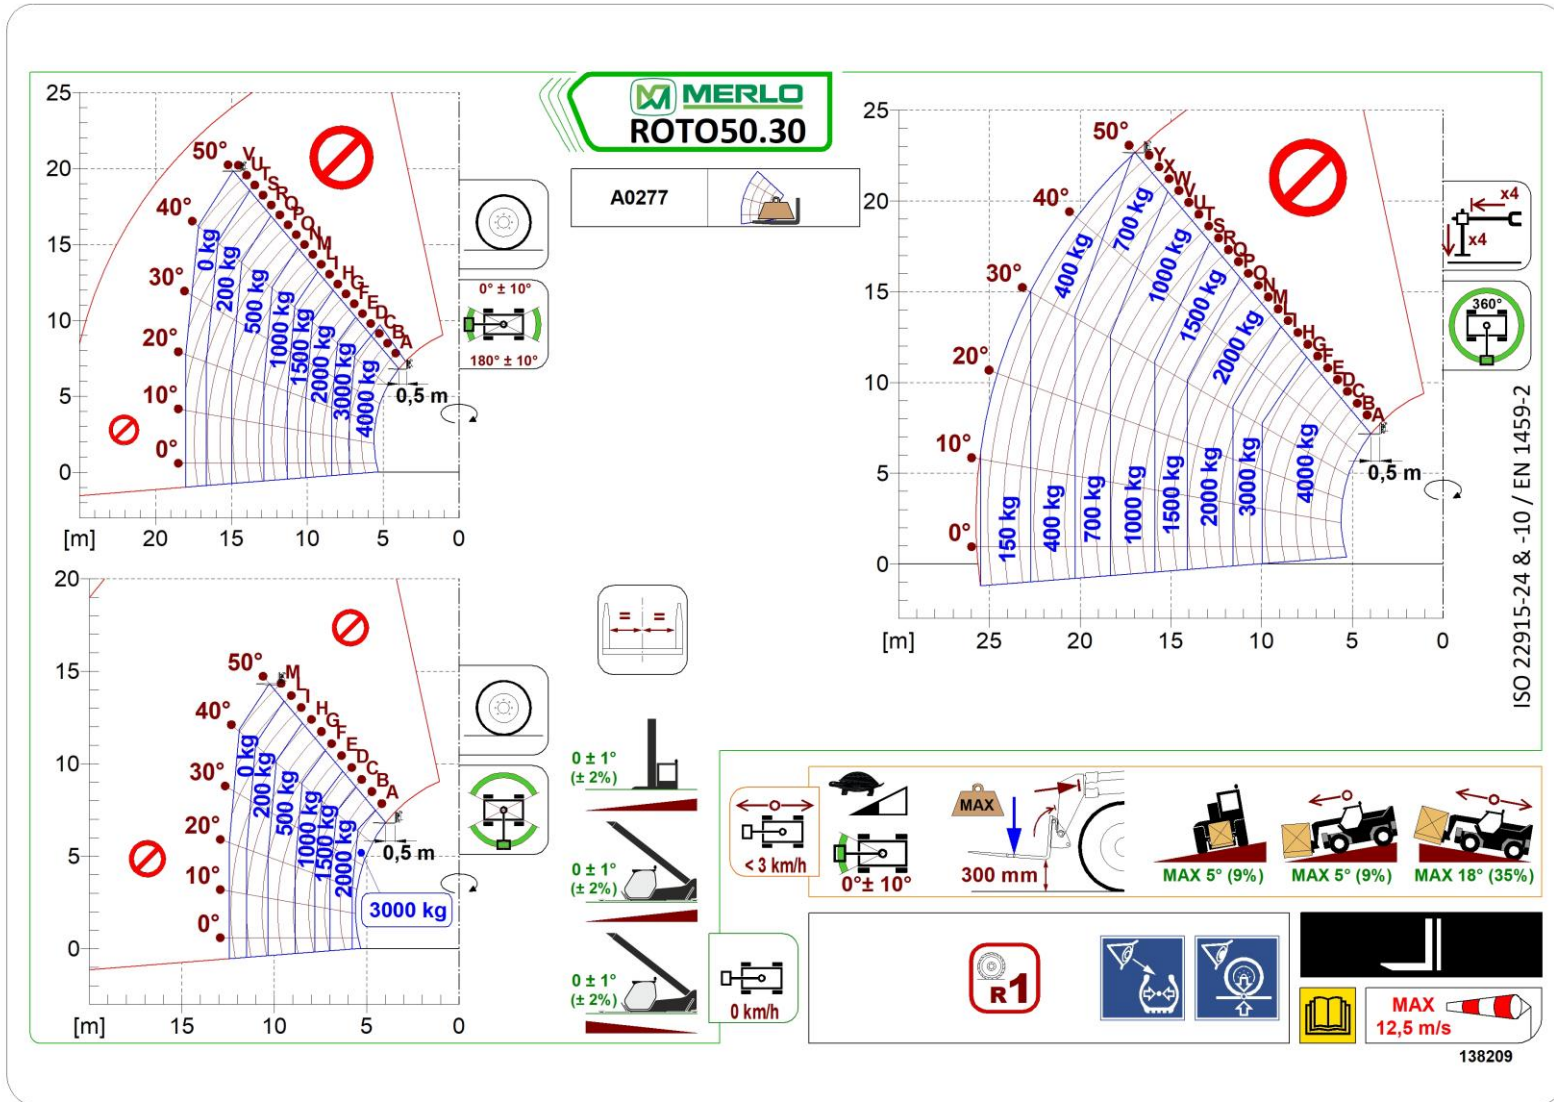



LUM00372 - B [M2-ROTO5030M-EU-02]

9 - 24

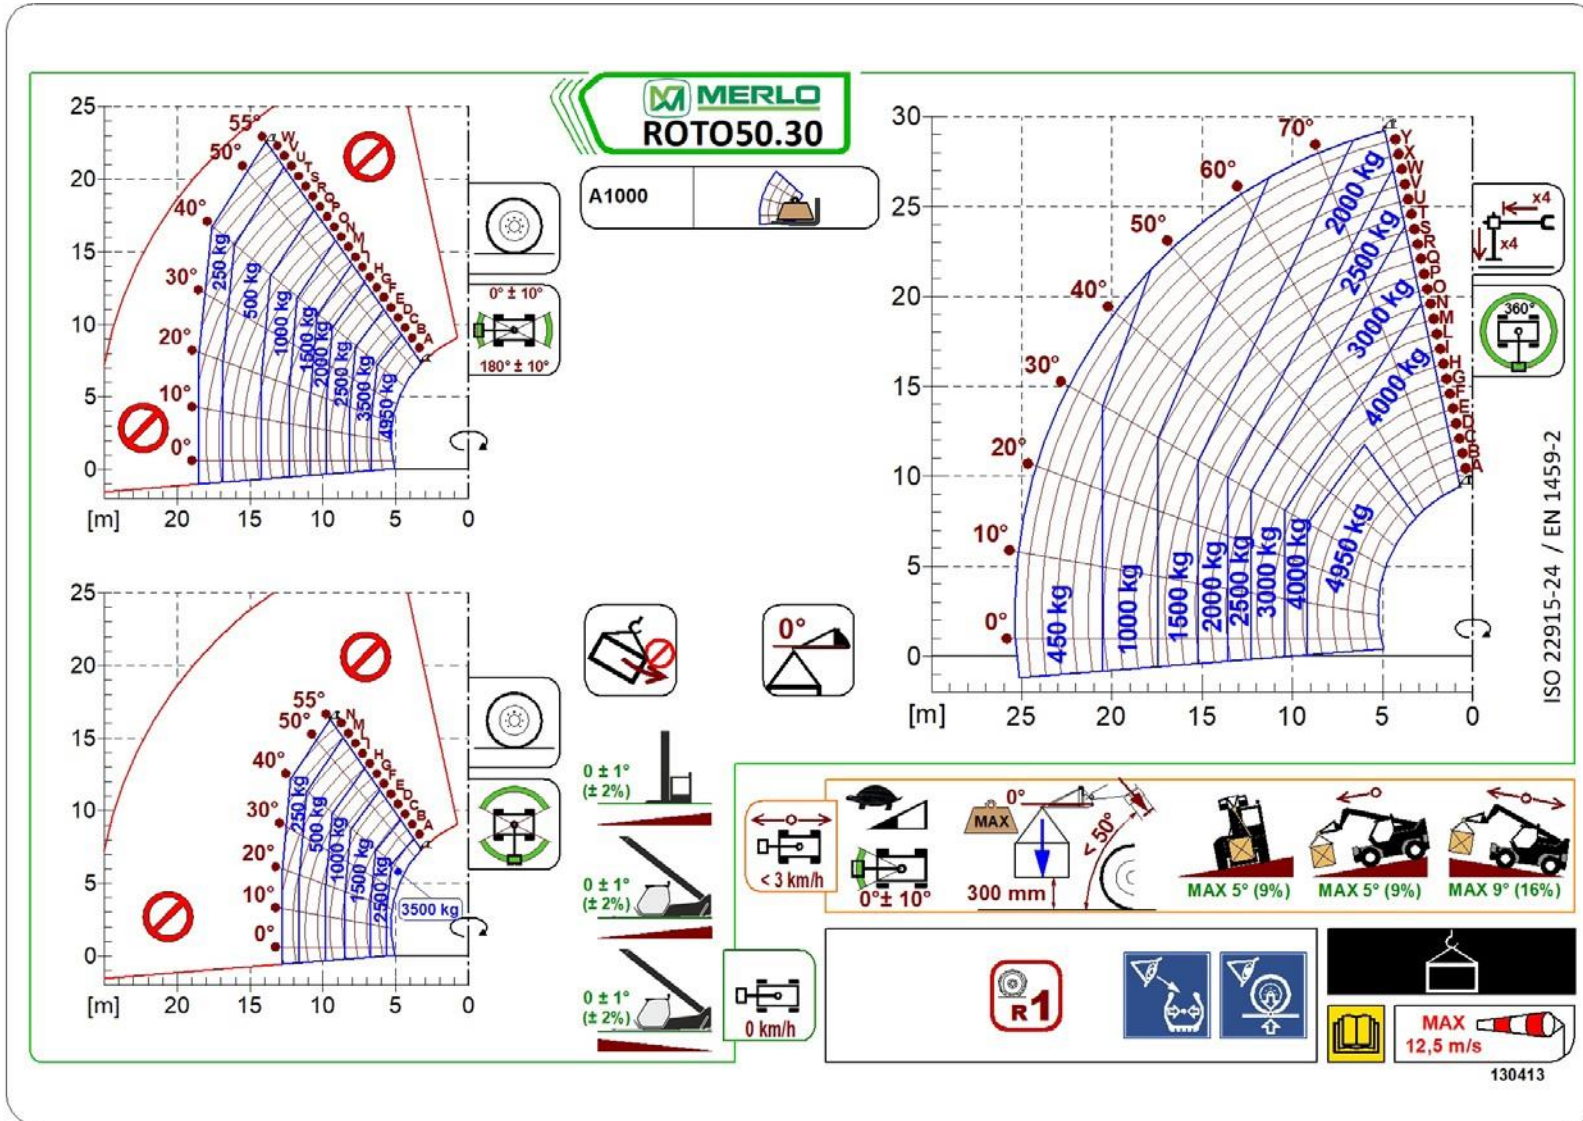

M2



BULTENA

VERHUUR BV

Bultena Verhuur BV

Postbus 10, 9040 AA Berlikum

administratie@bultena.nl

T 085 - 48 92 181


| www.bultena.nl

Vestigingen: Alphen ad Rijn | Berlikum | Groningen | Mill

10 - 24

LUM00372 - B [M2-ROTO5030M-EU-02]


M2

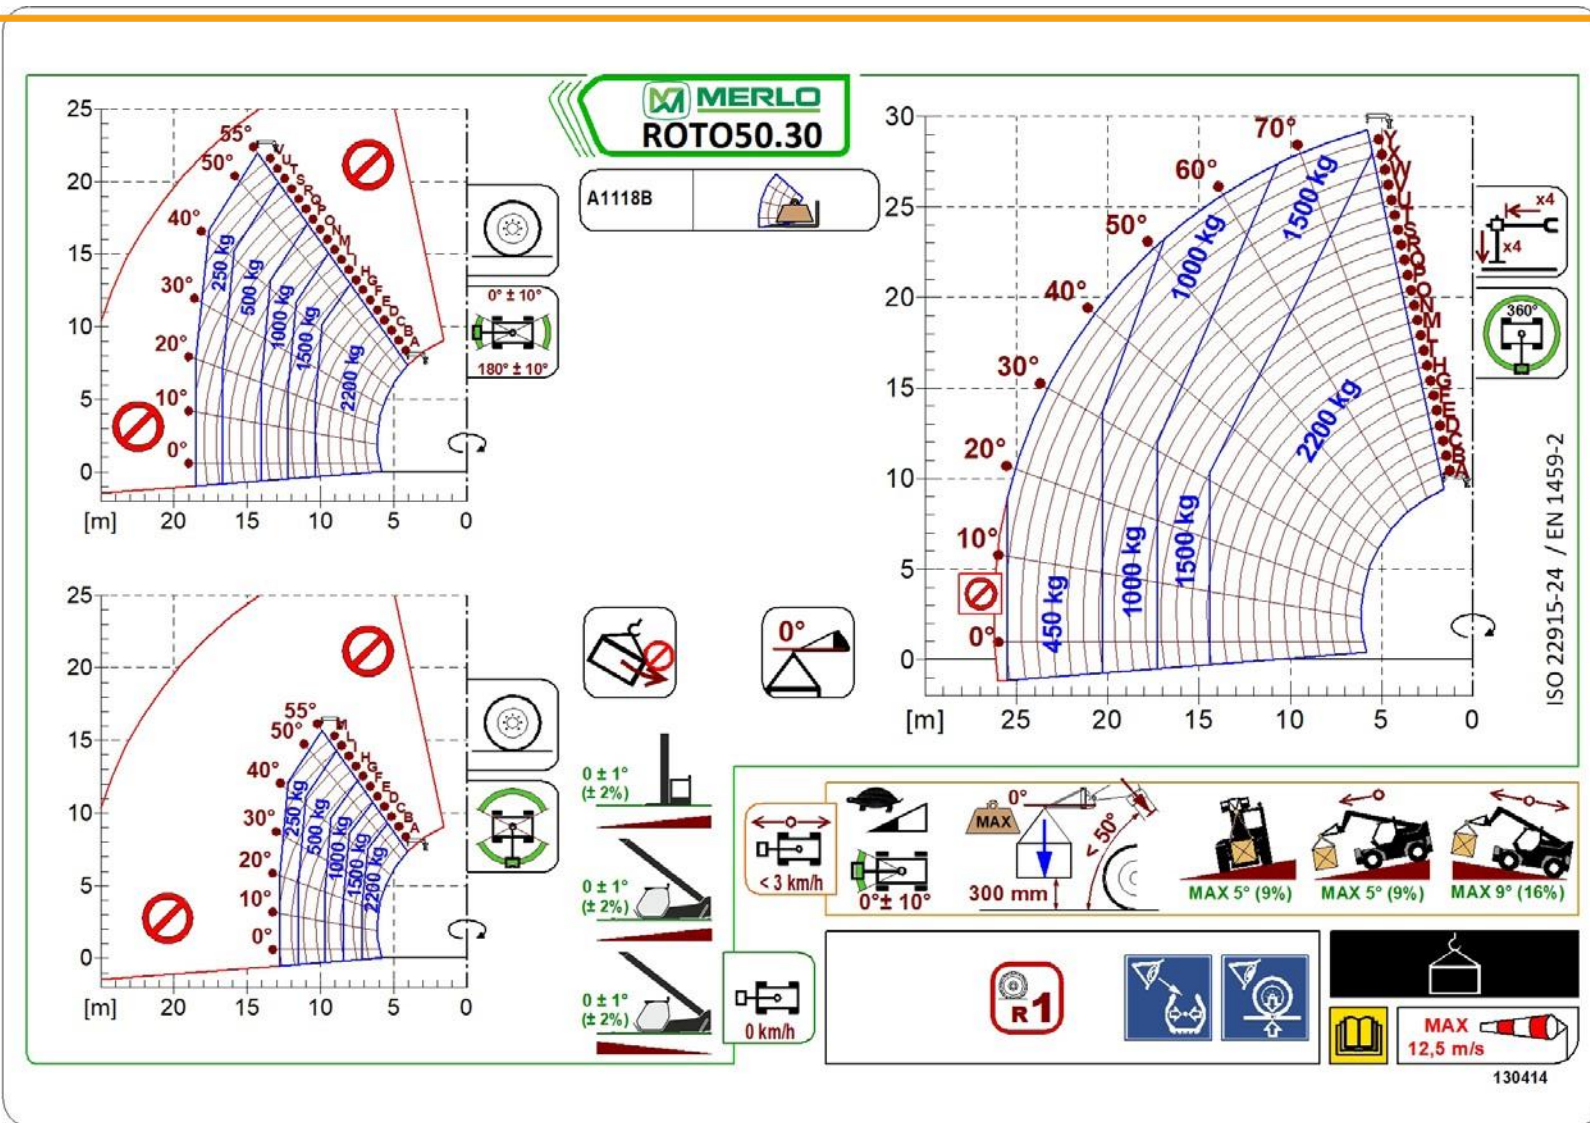


130414

LUM00372 - B [M2-ROTO5030M-EU-02]

11 - 24

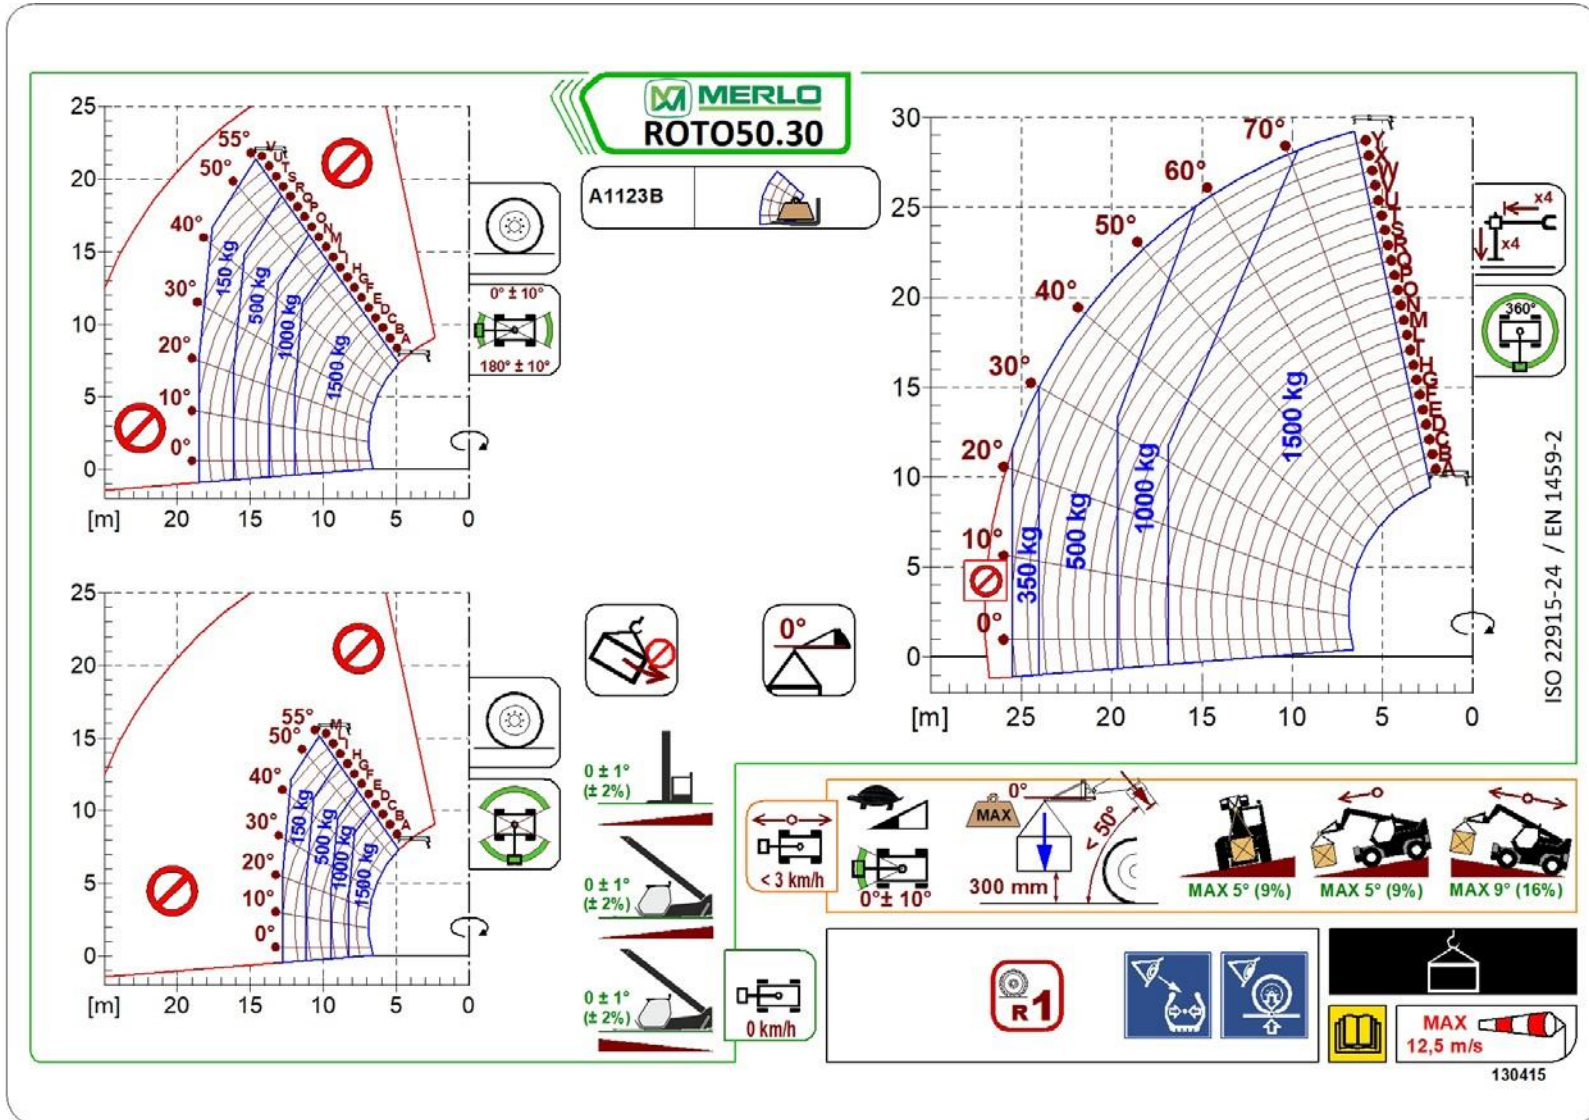


M2

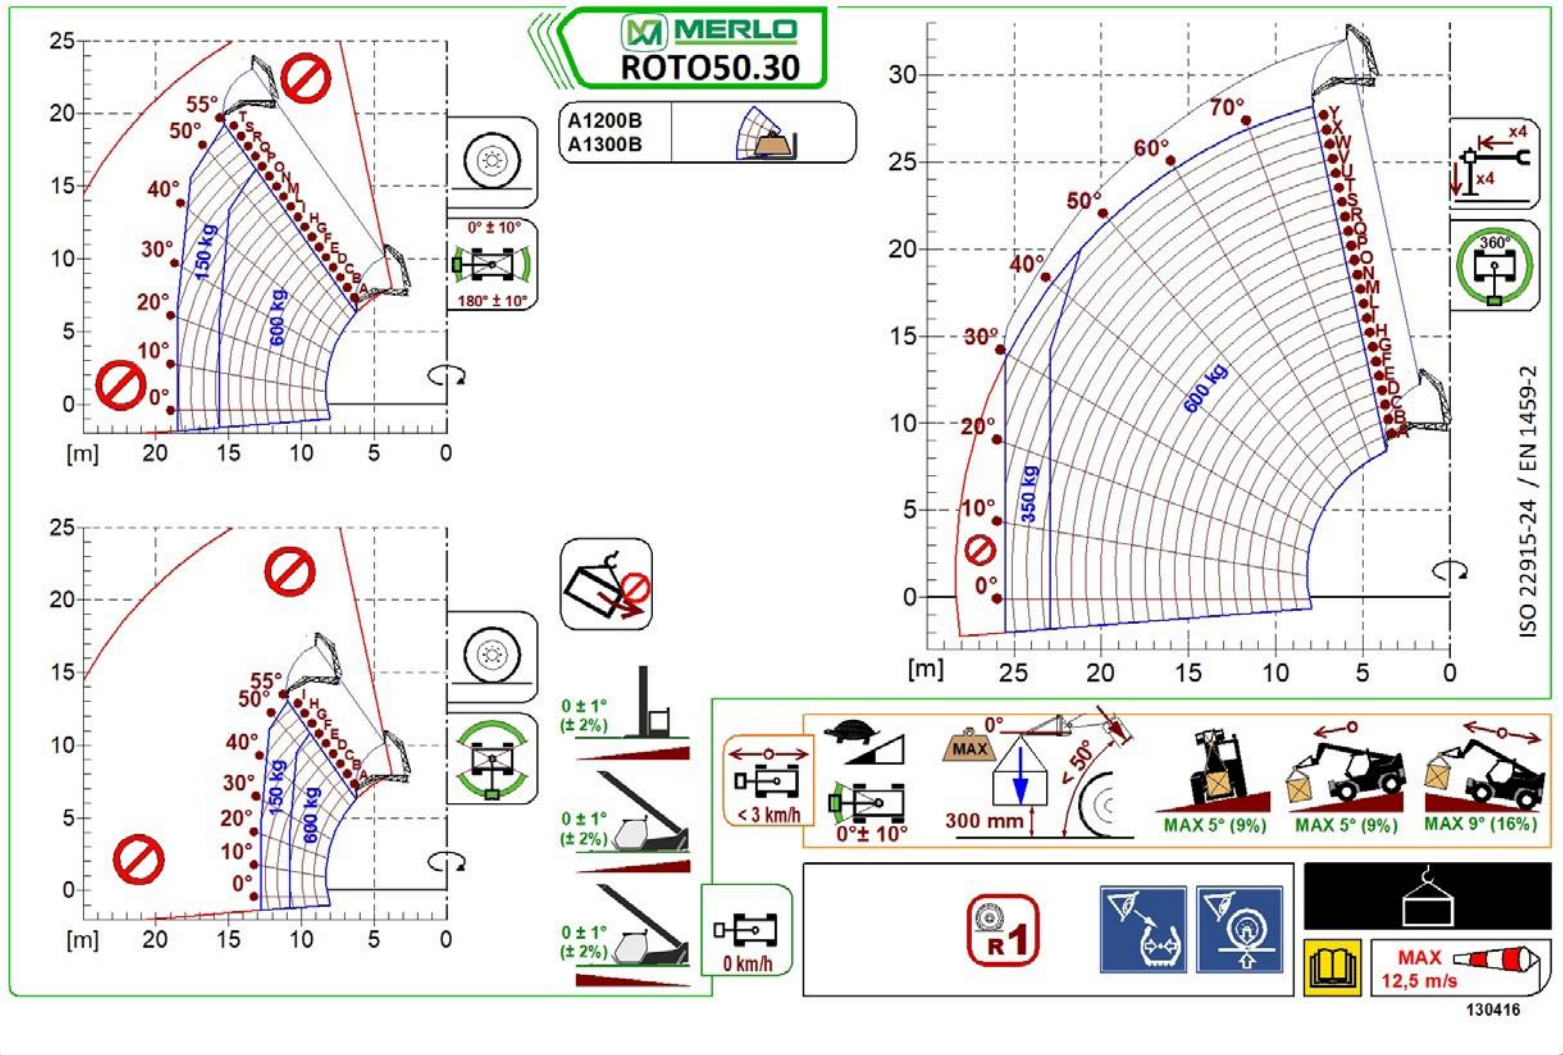


LUM00372 - B [M2-ROTO5030M-EU-02]

13 - 24

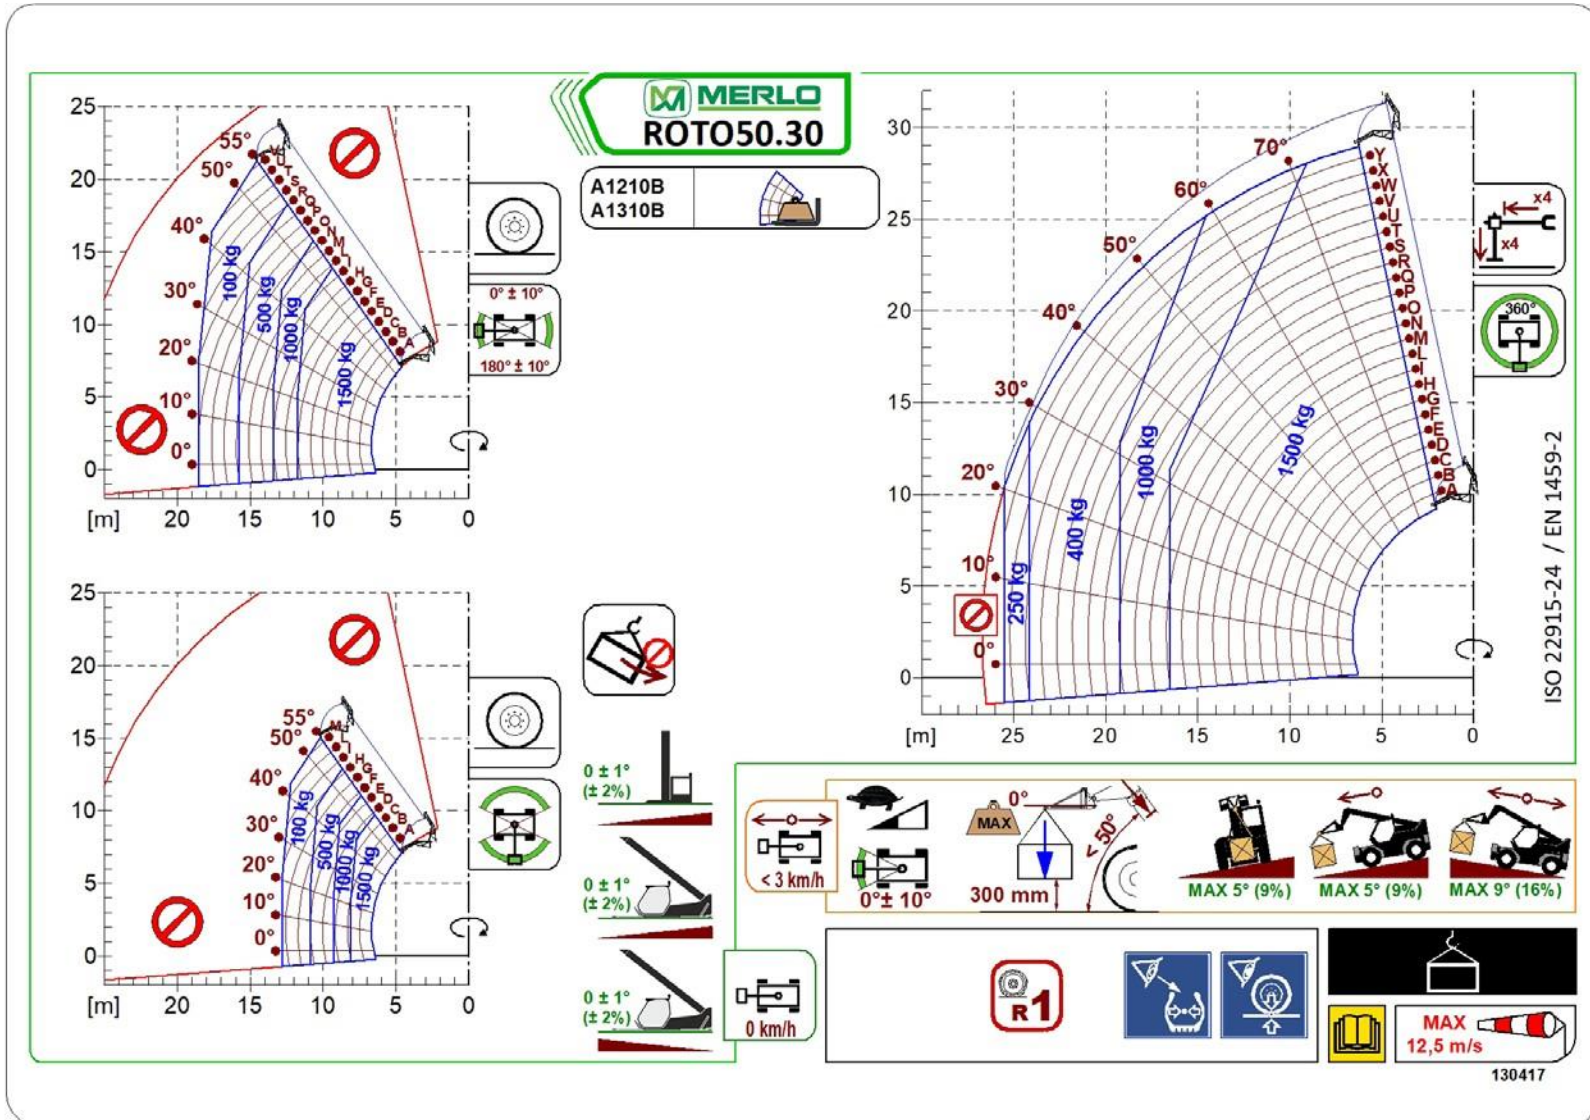


M2

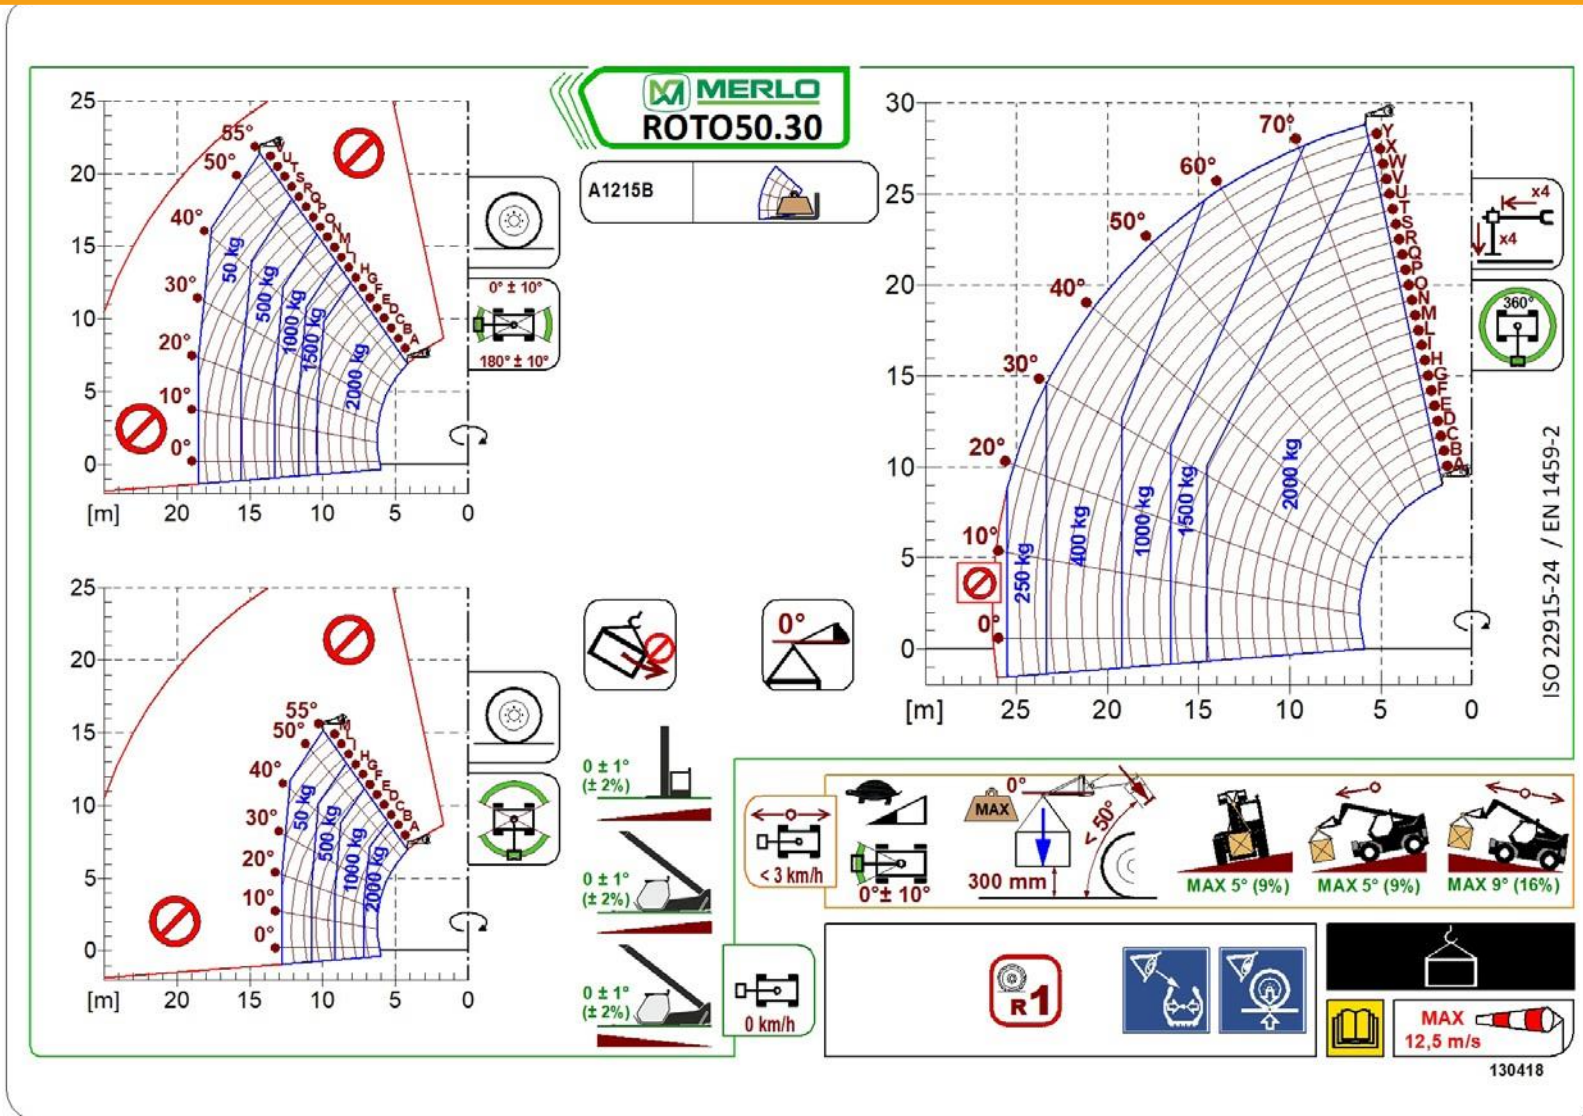


LUM00372 - B [M2-ROTO5030M-EU-02]

15 - 24

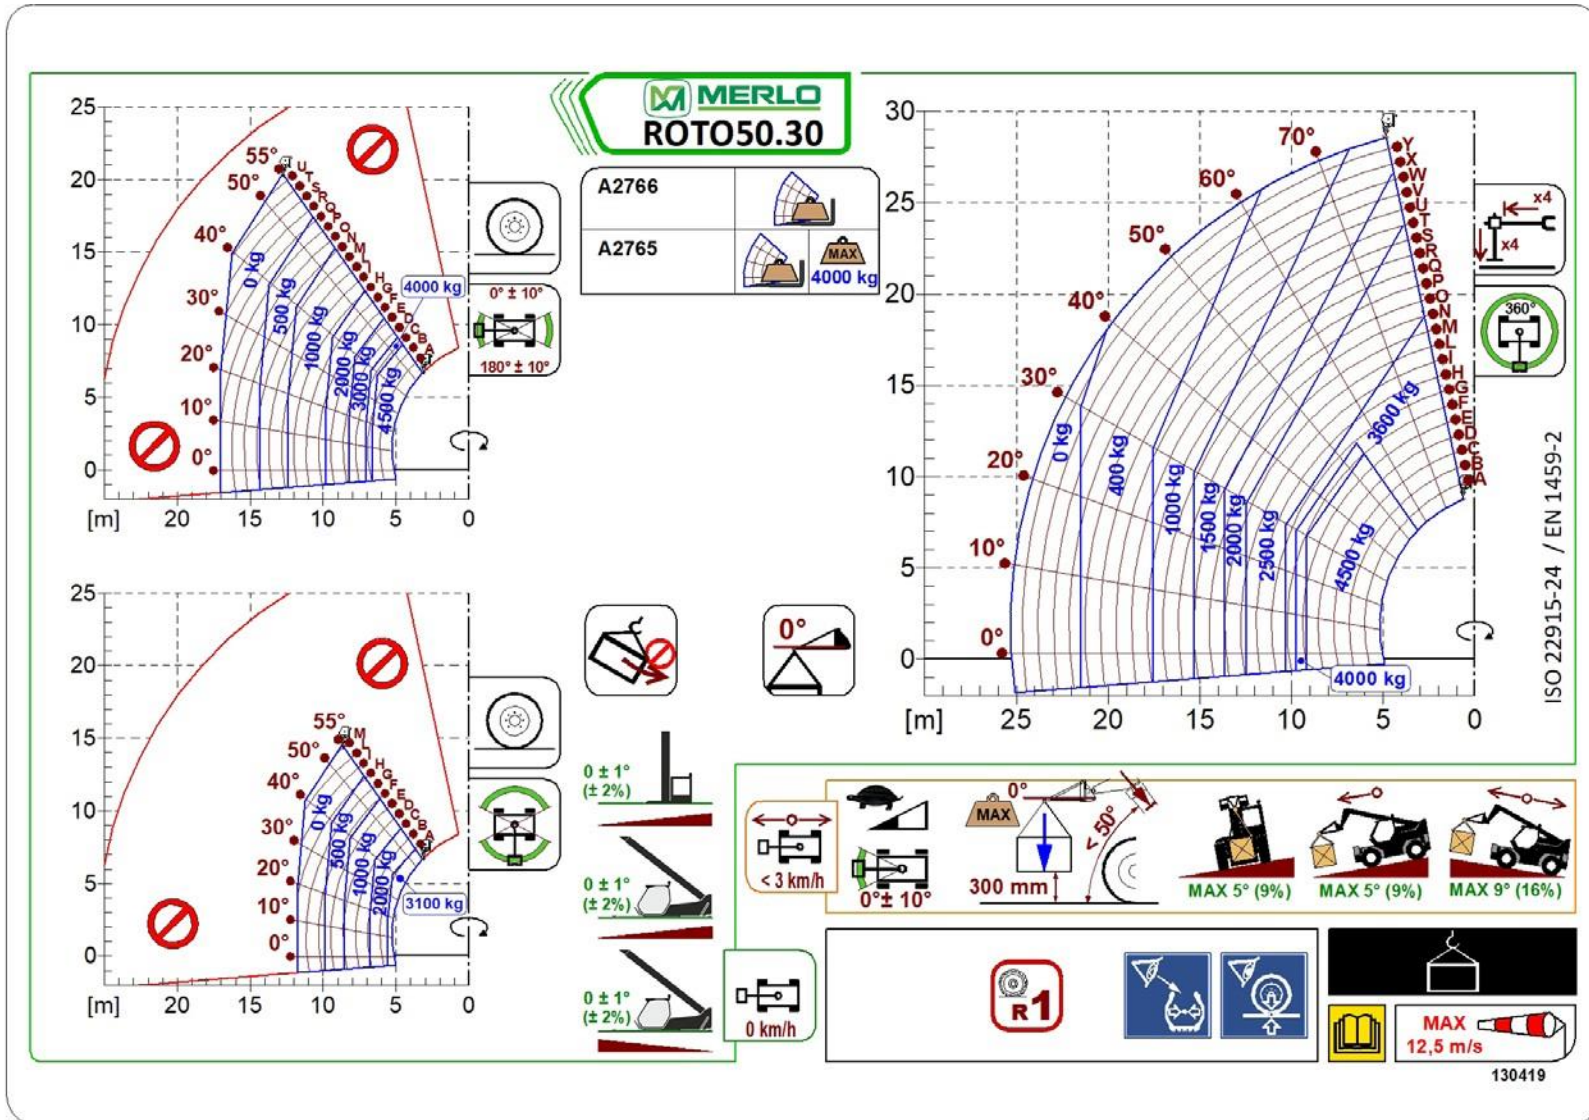

M2

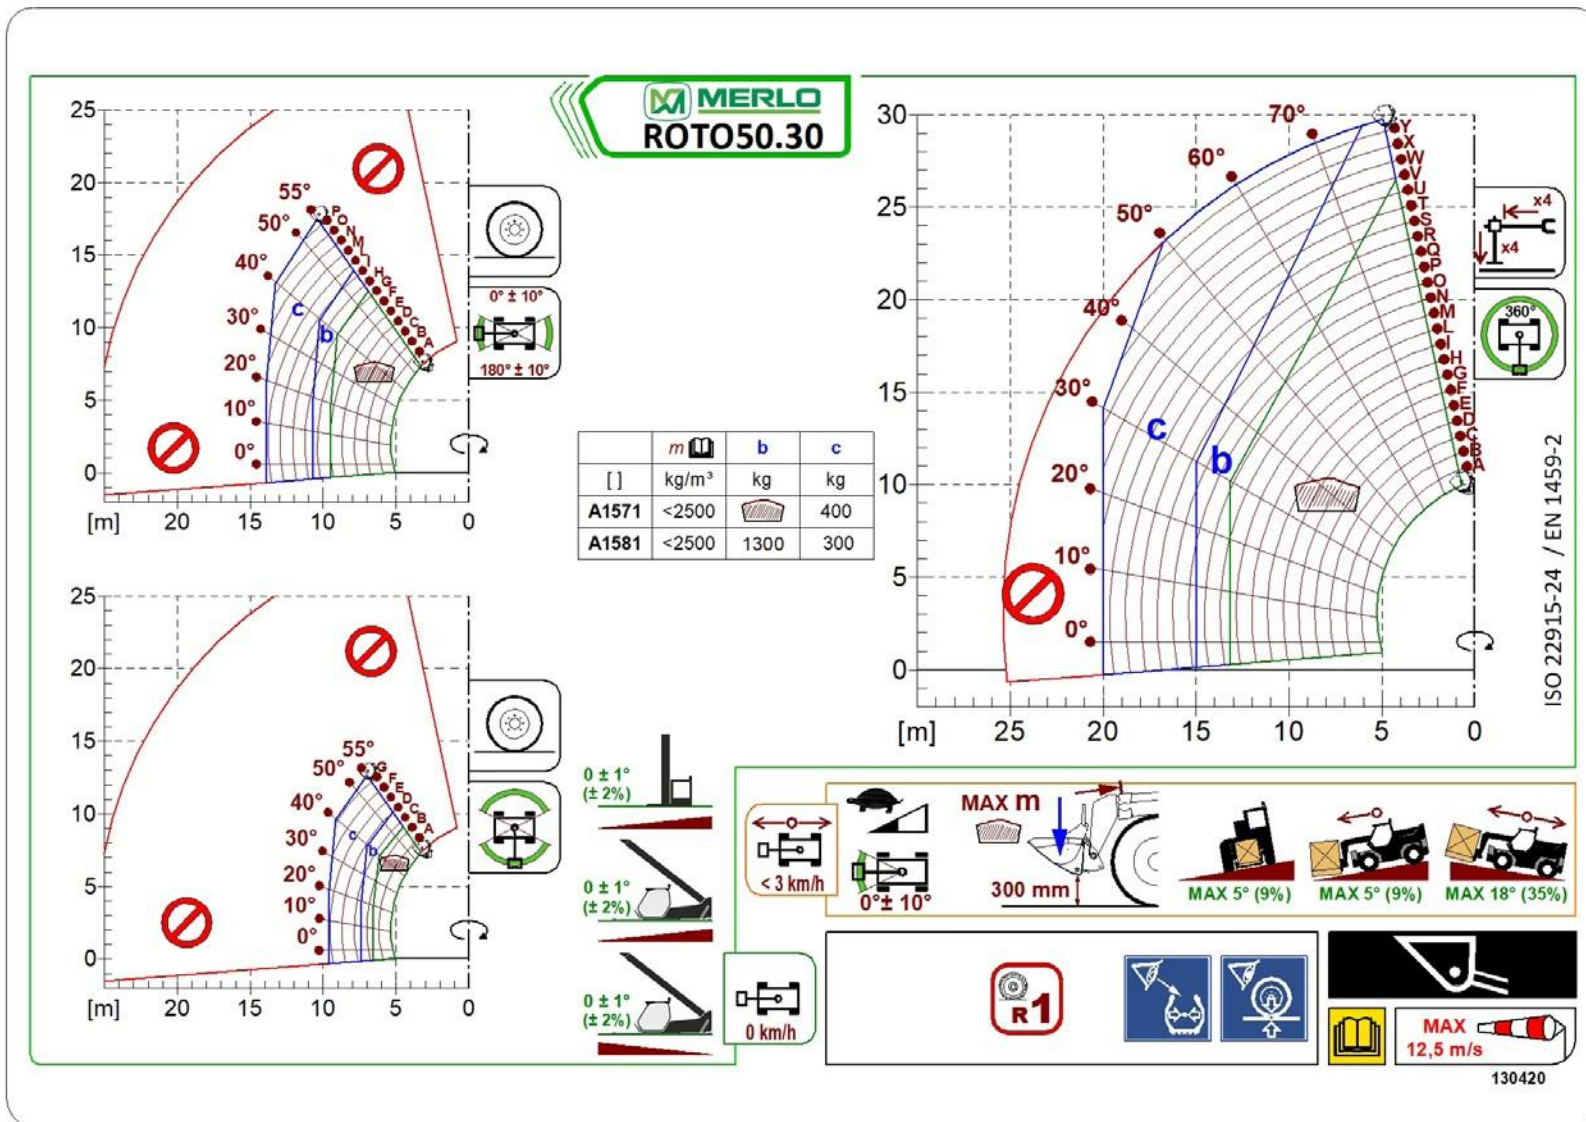


130420




LUM00372 - B [M2-ROTO5030M-EU-02]

17 - 24

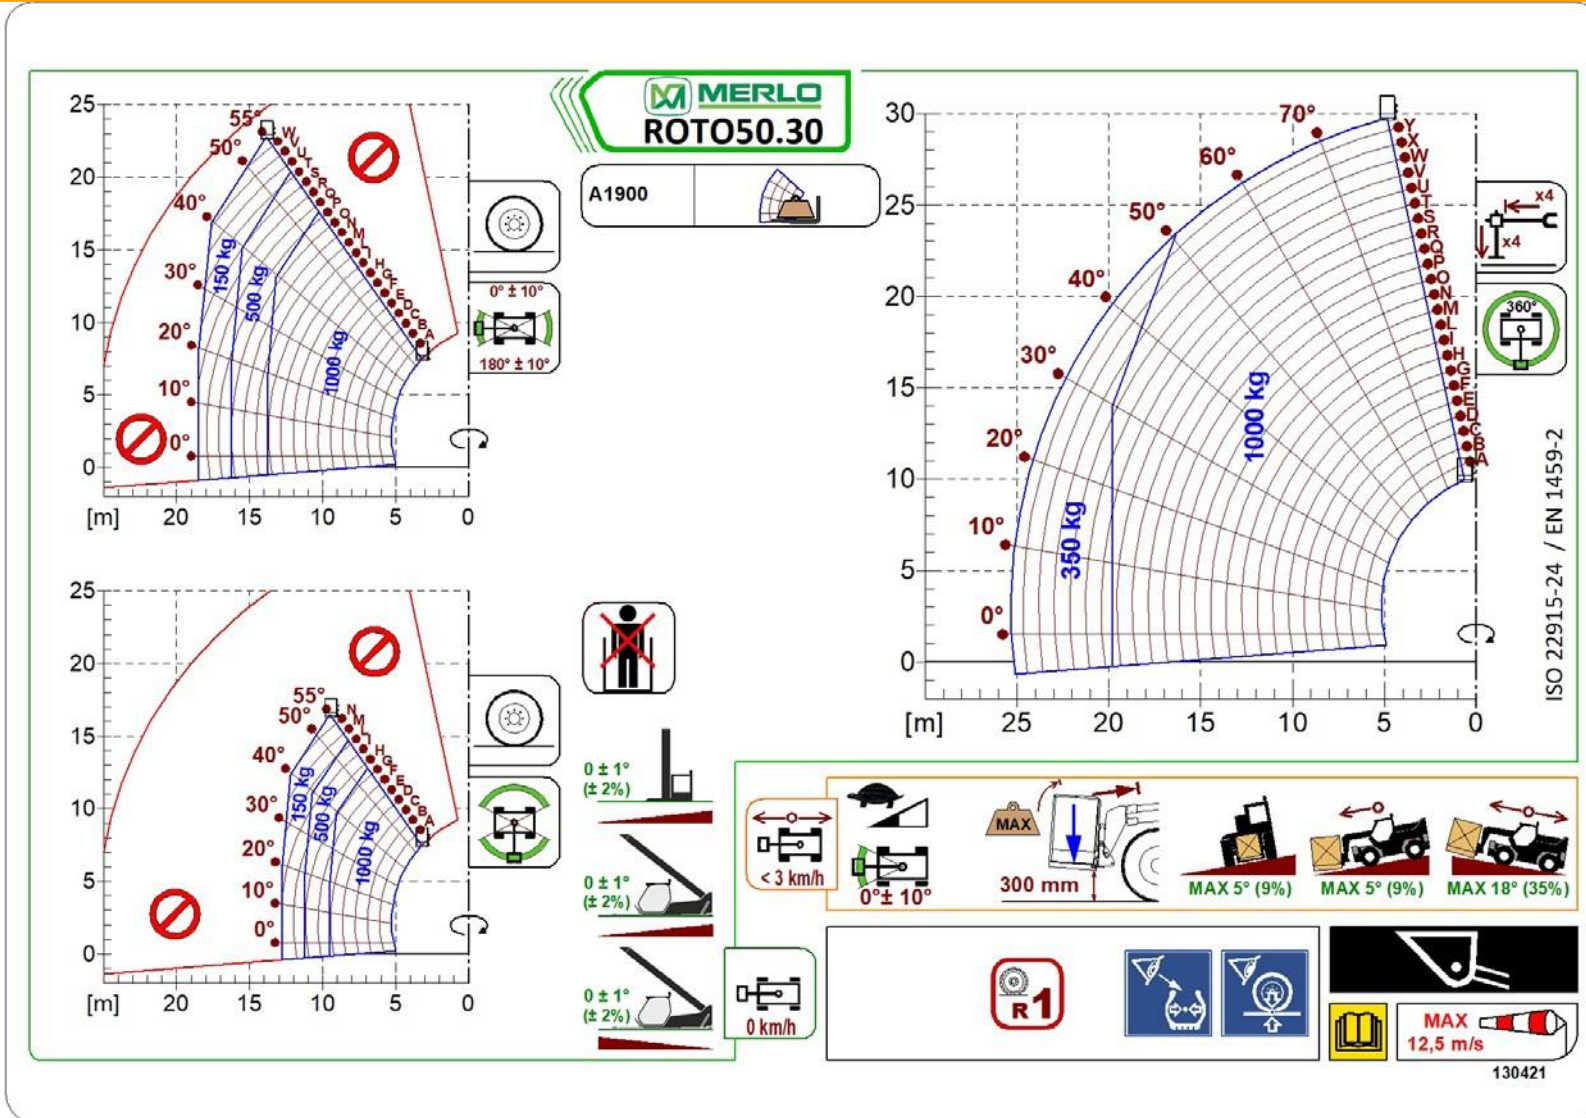


M2

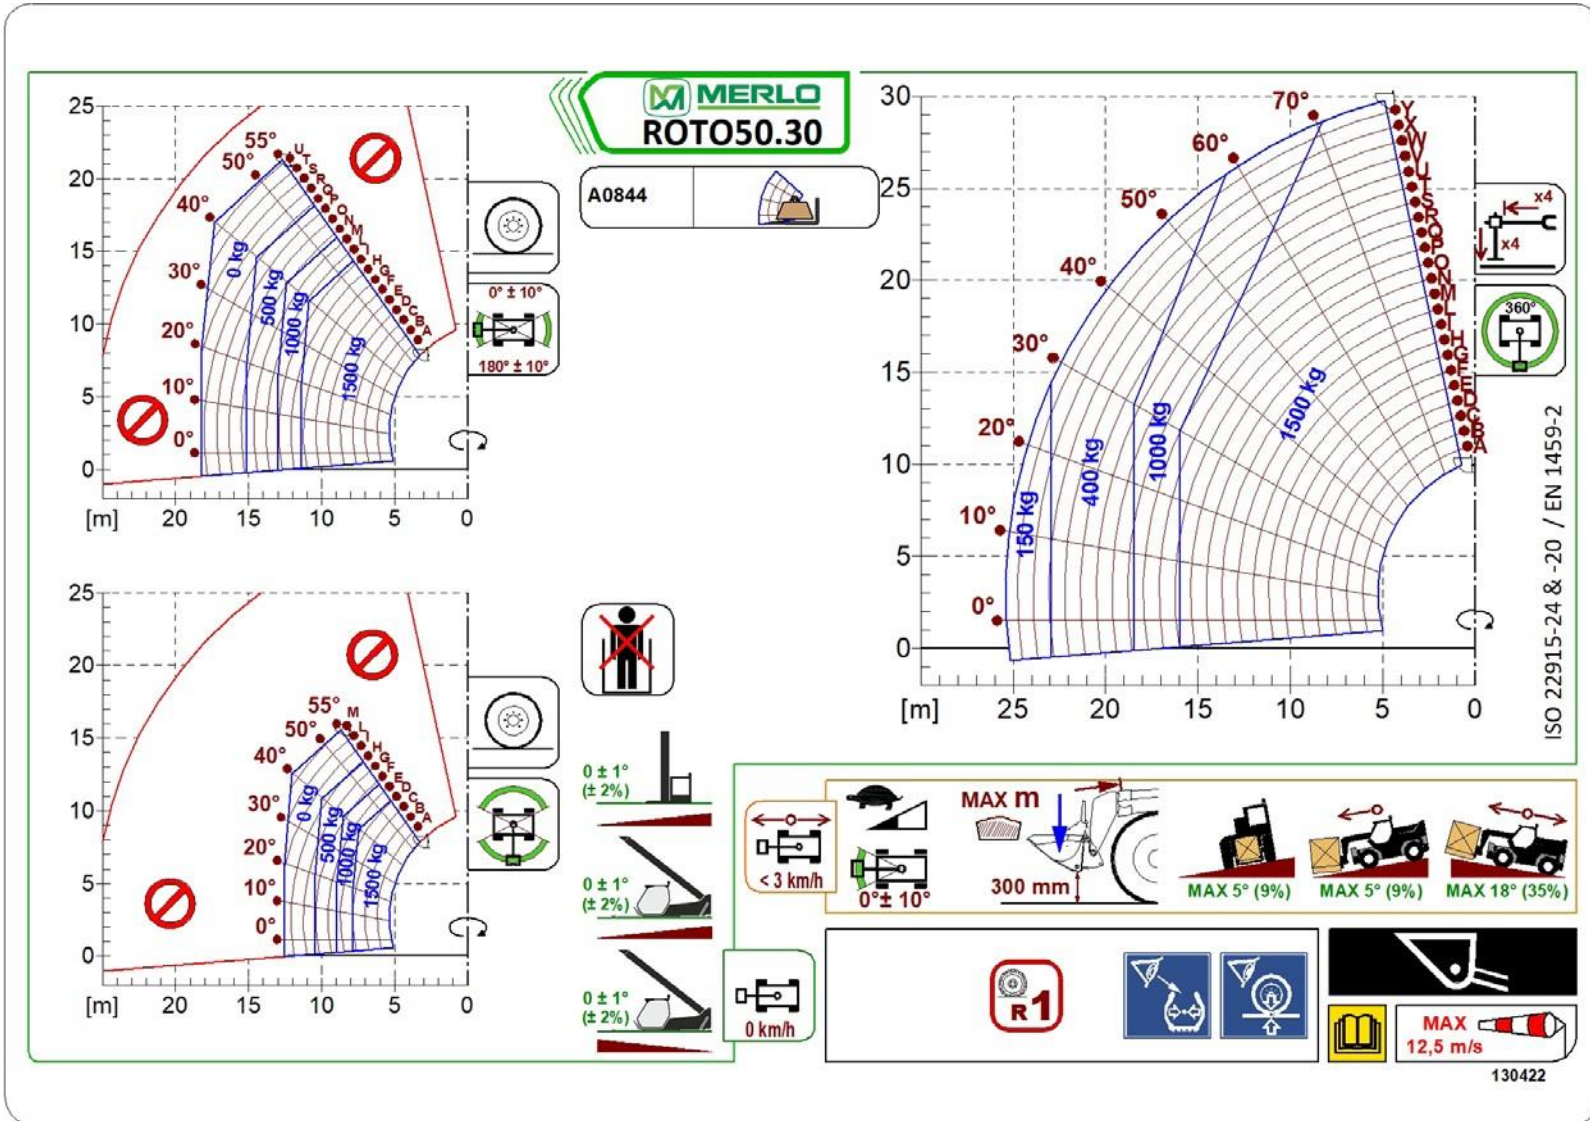




LUM00372 - B [M2-ROTO5030M-EU-02]

19 - 24

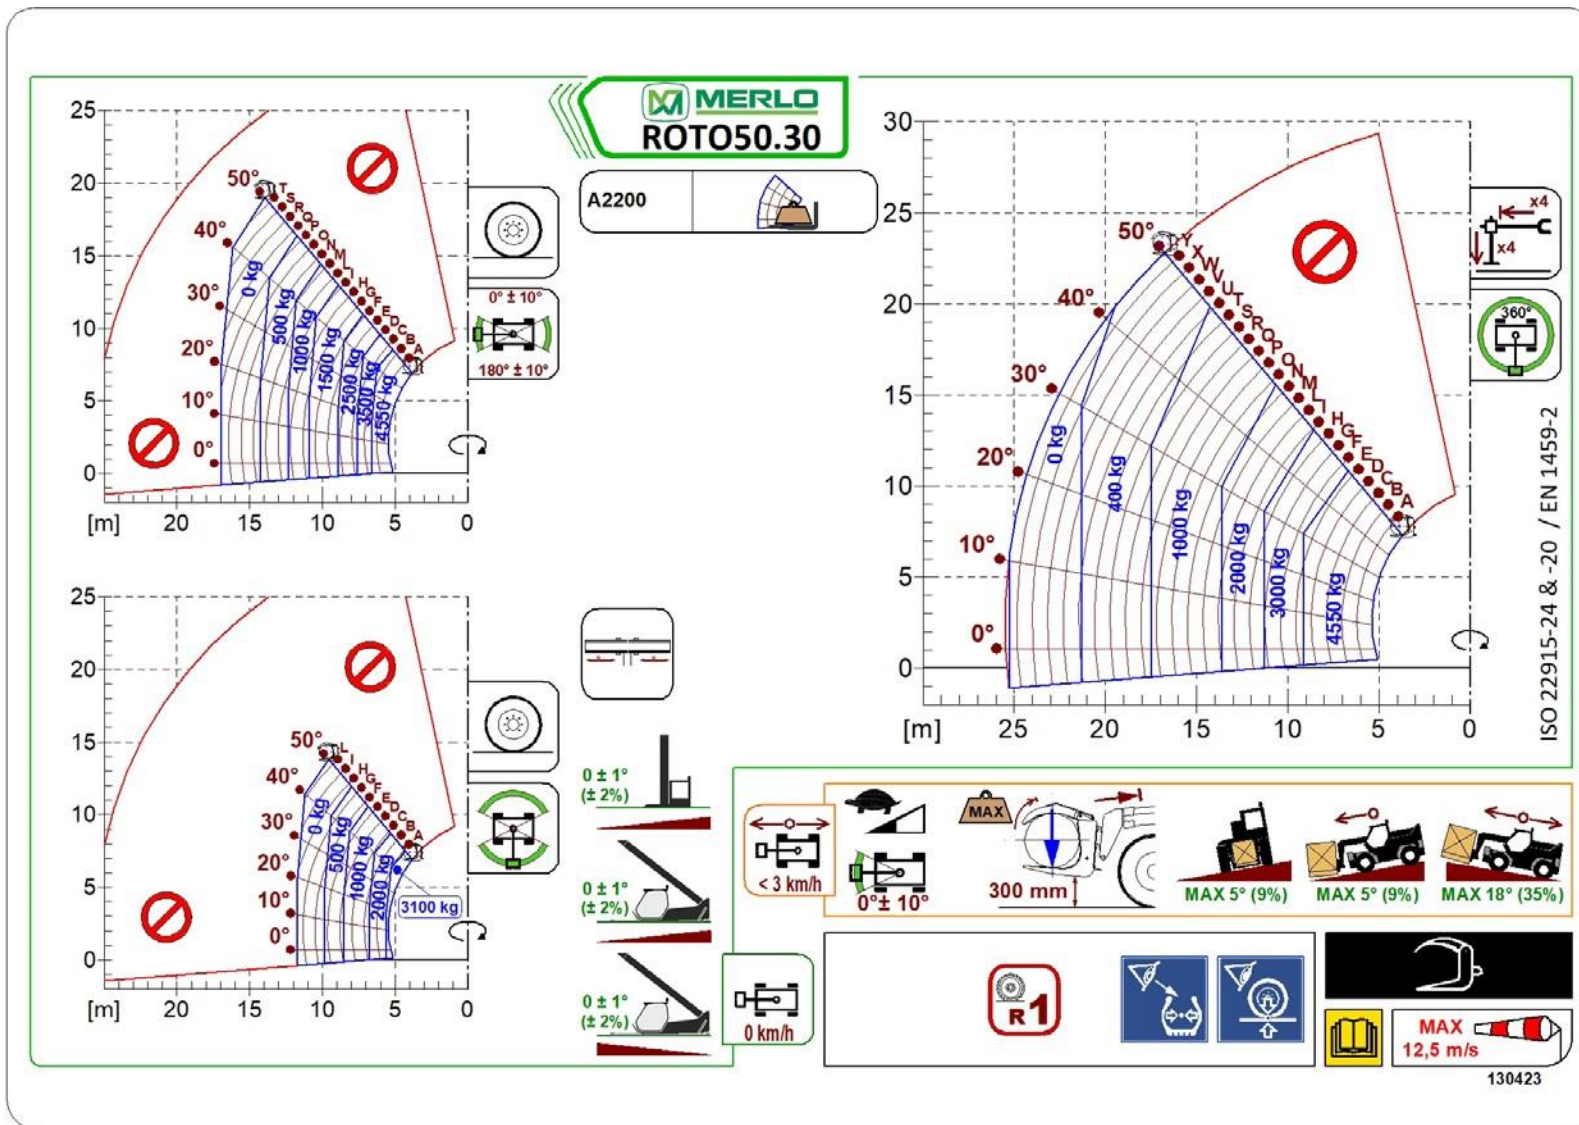


M2

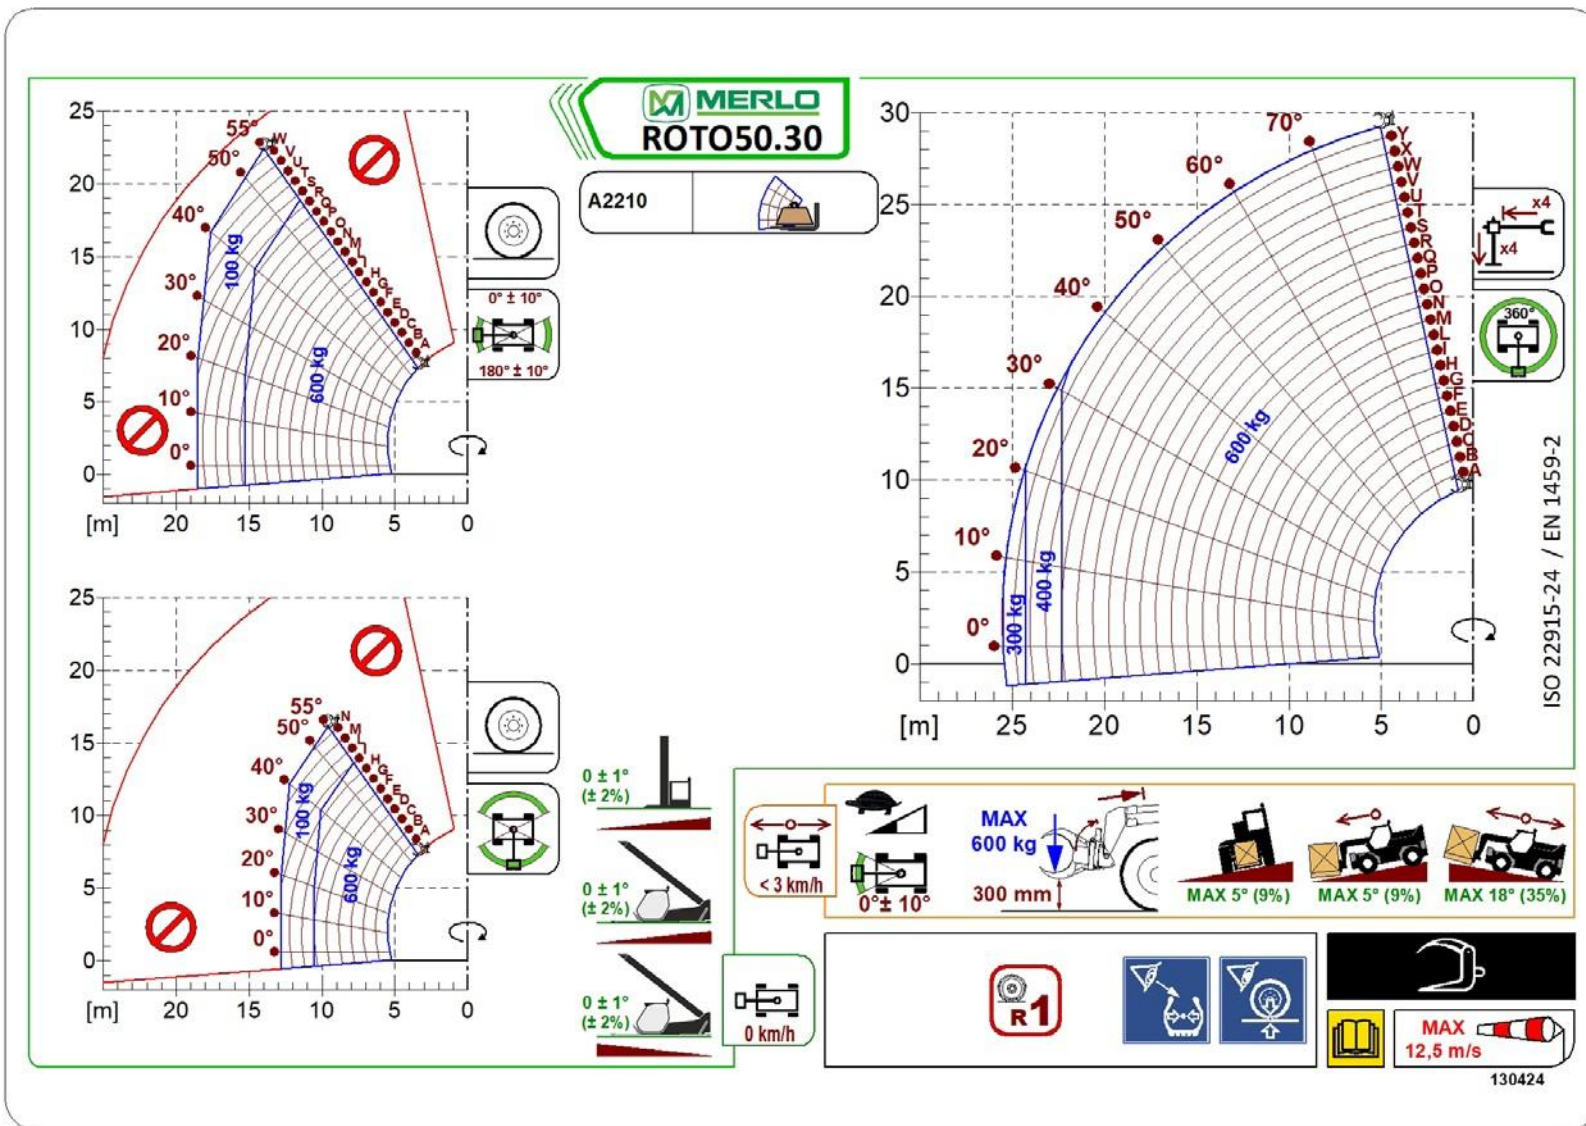


LUM00372 - B [M2-ROTO5030M-EU-02]


21 - 24

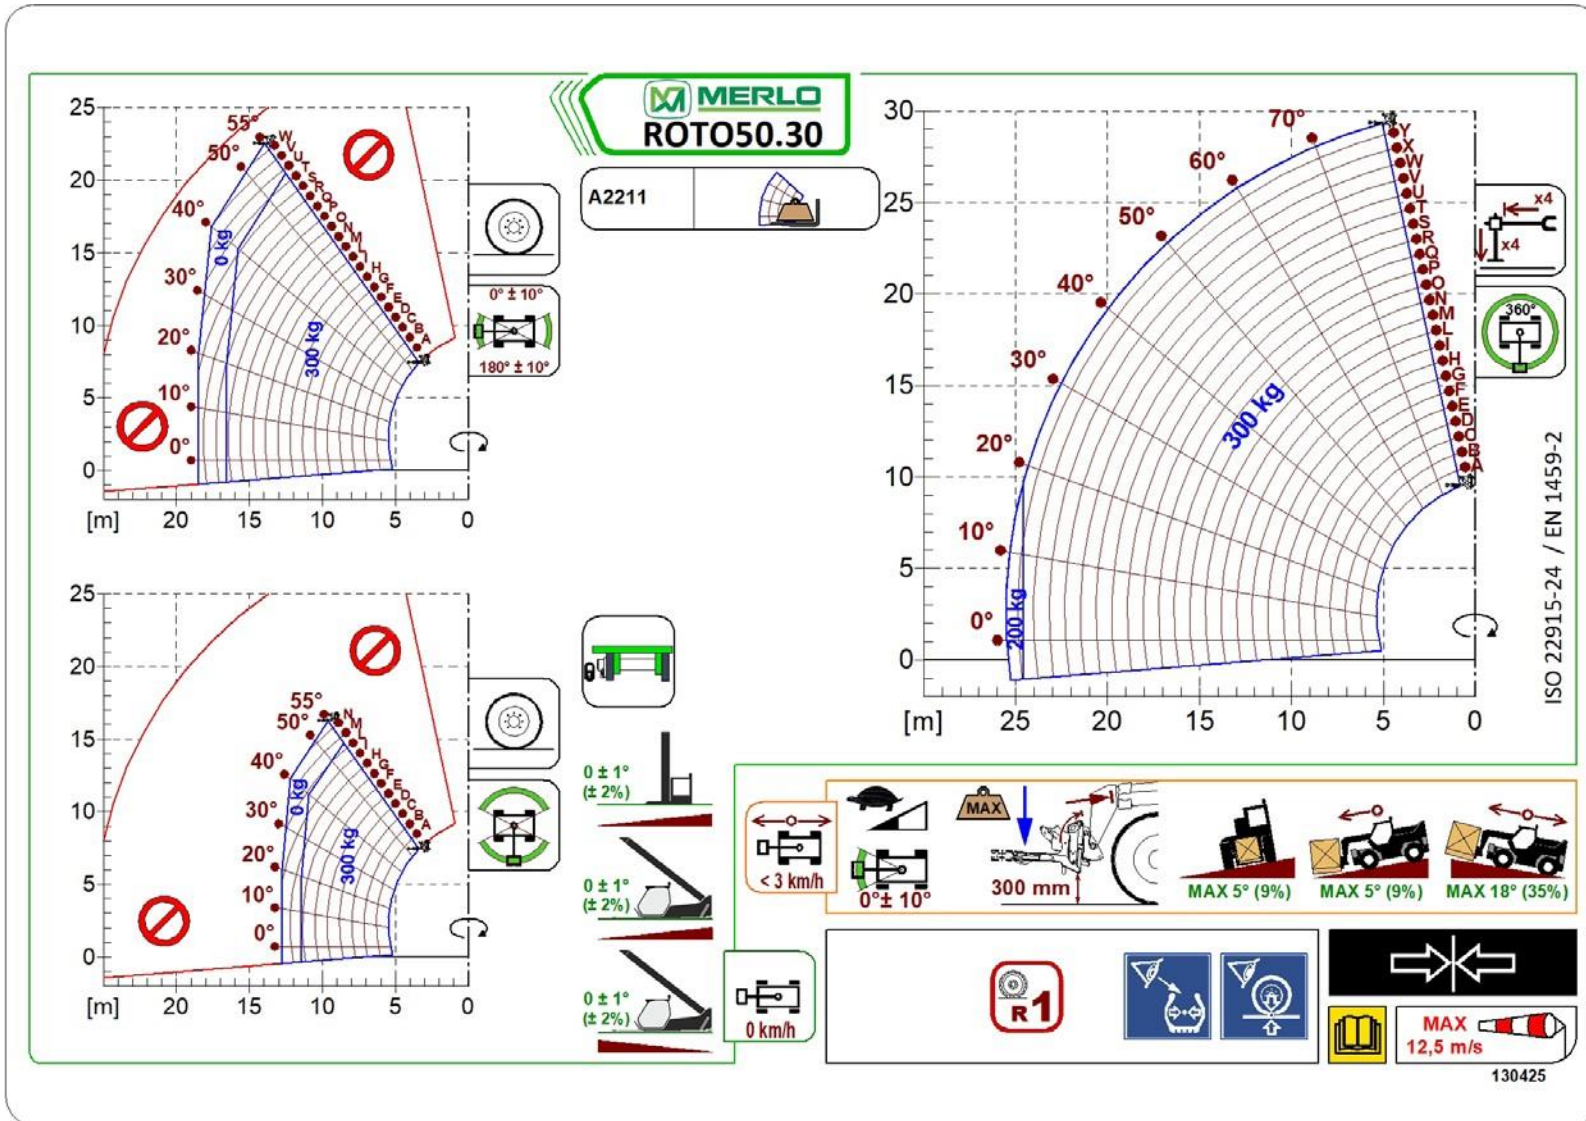

M2

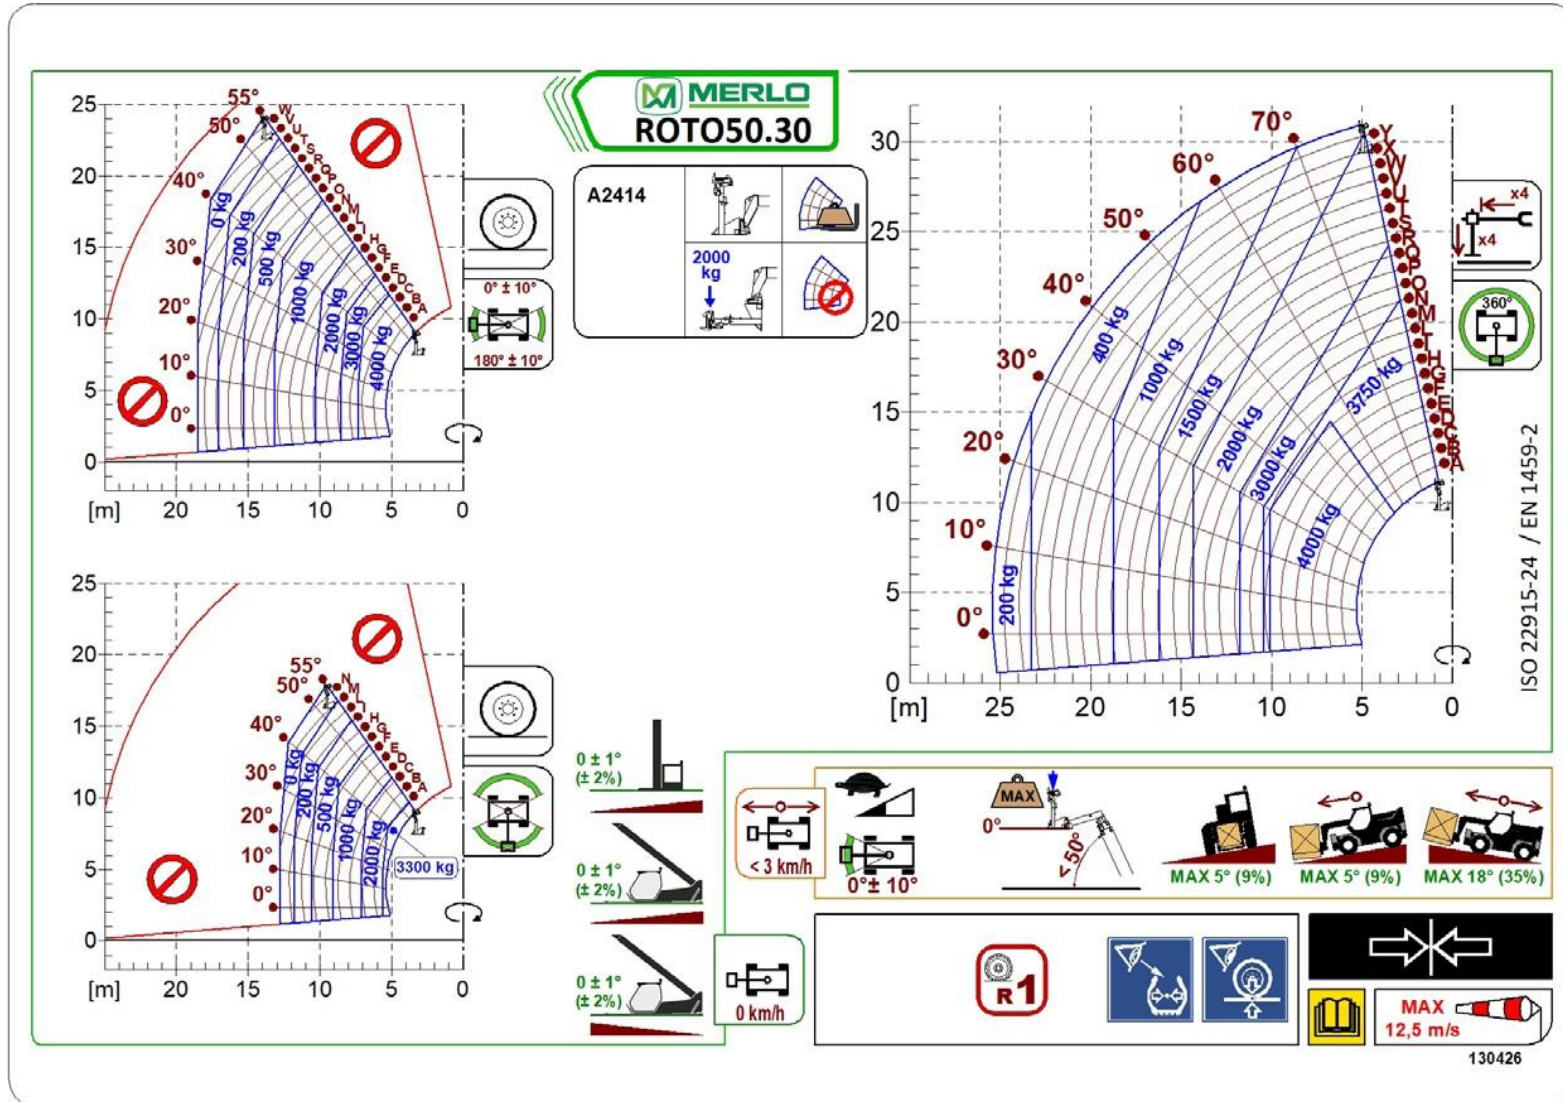




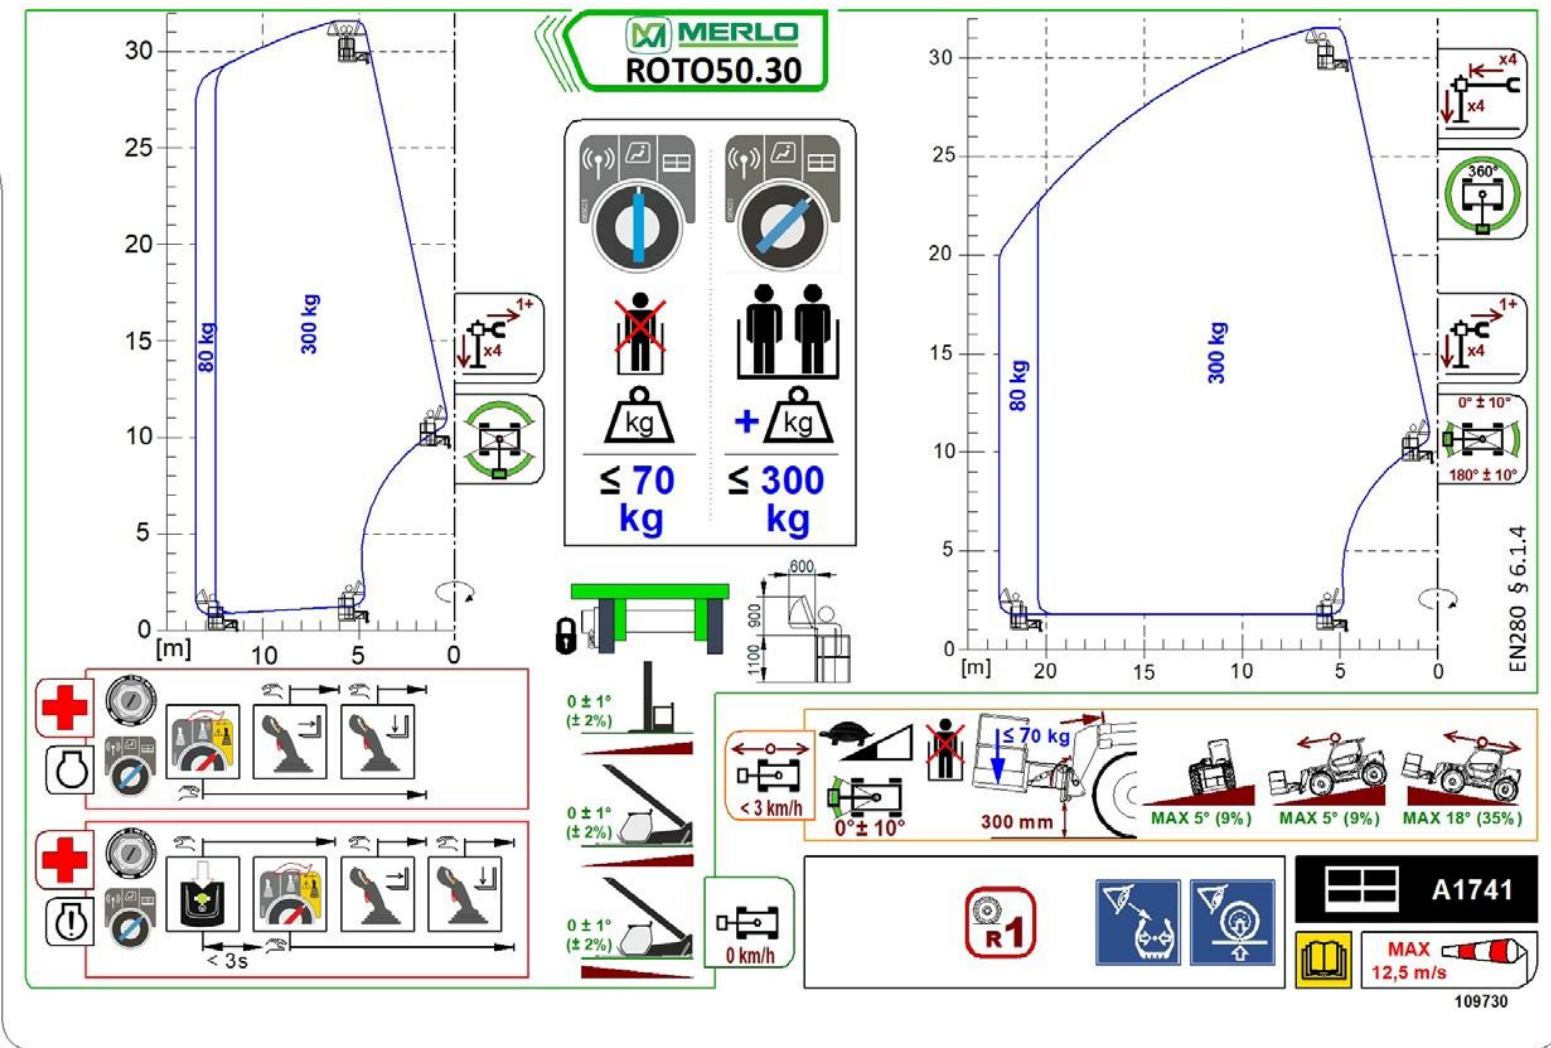


LUM00375-B [M2B-R5030-EU-01]



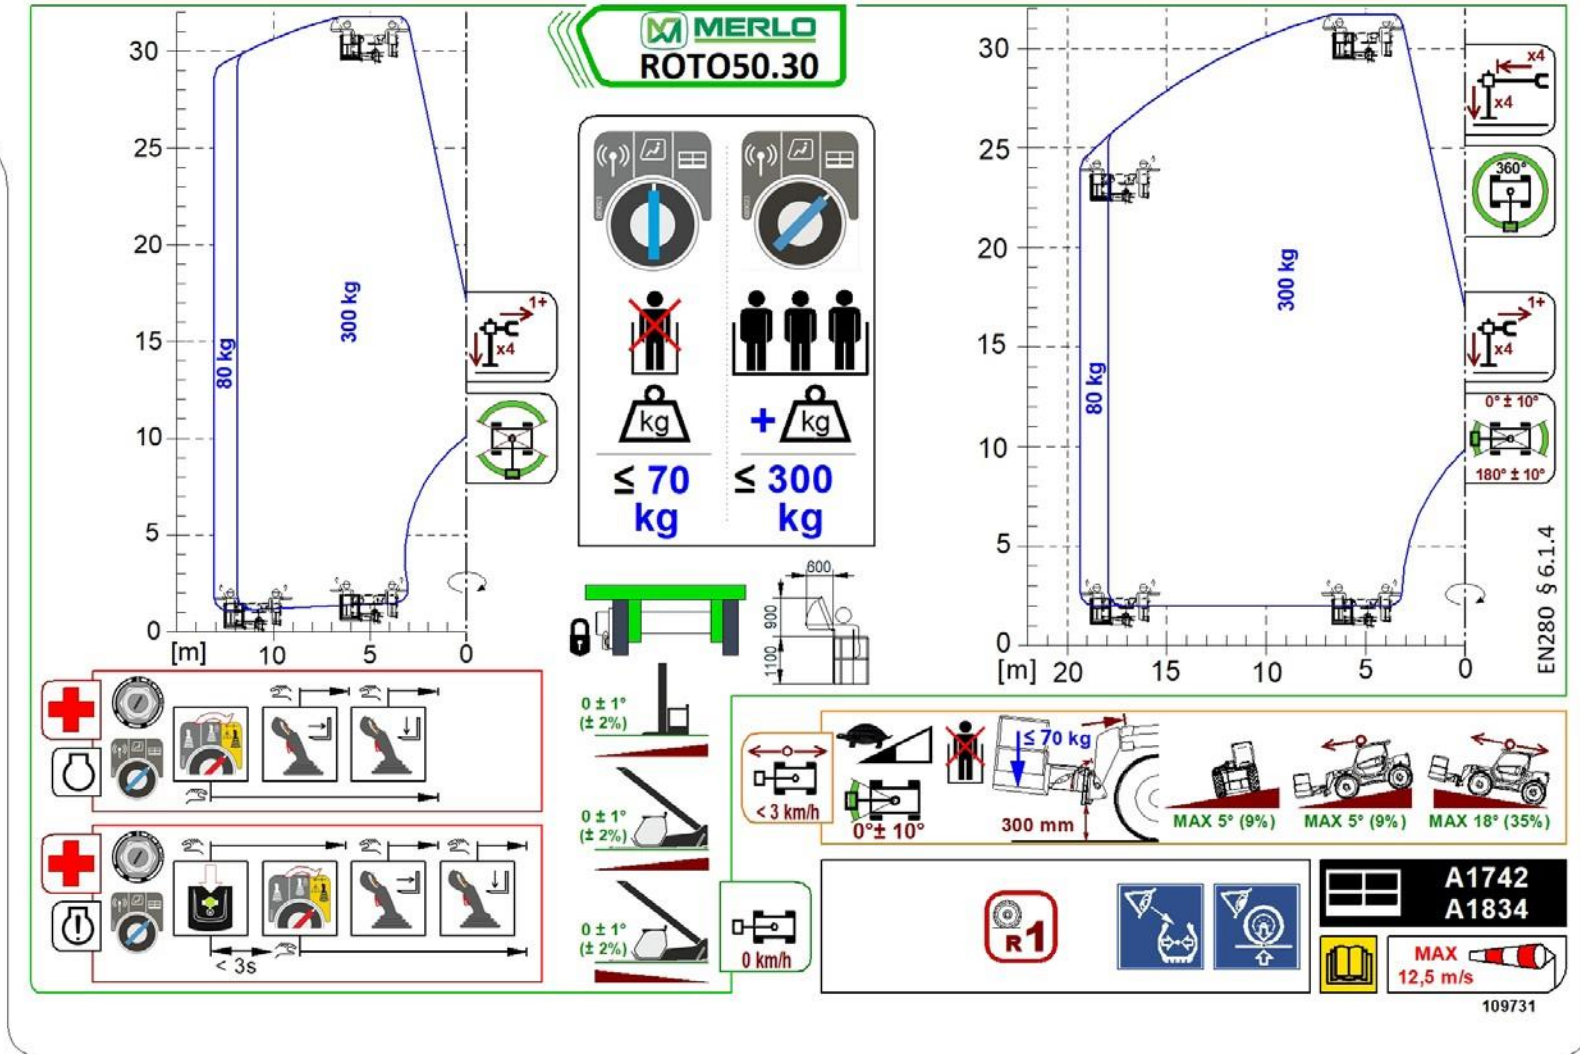


LUM00375-B [M2B-R5030-EU-01]

3 - 12

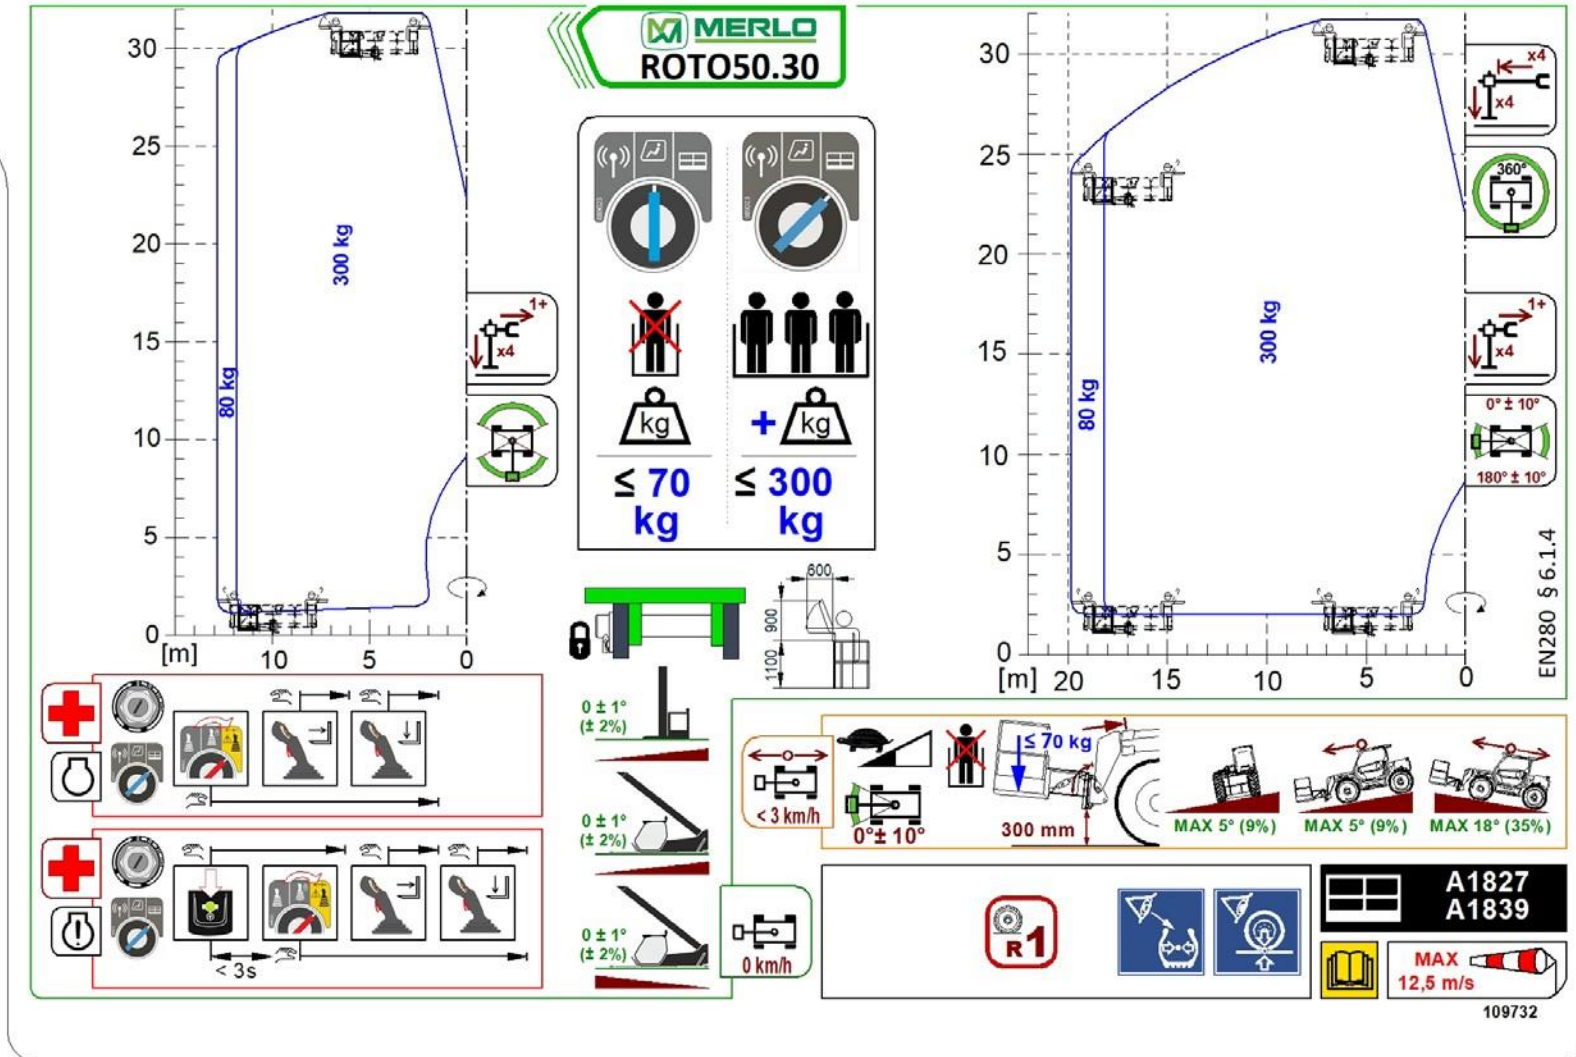

M2B

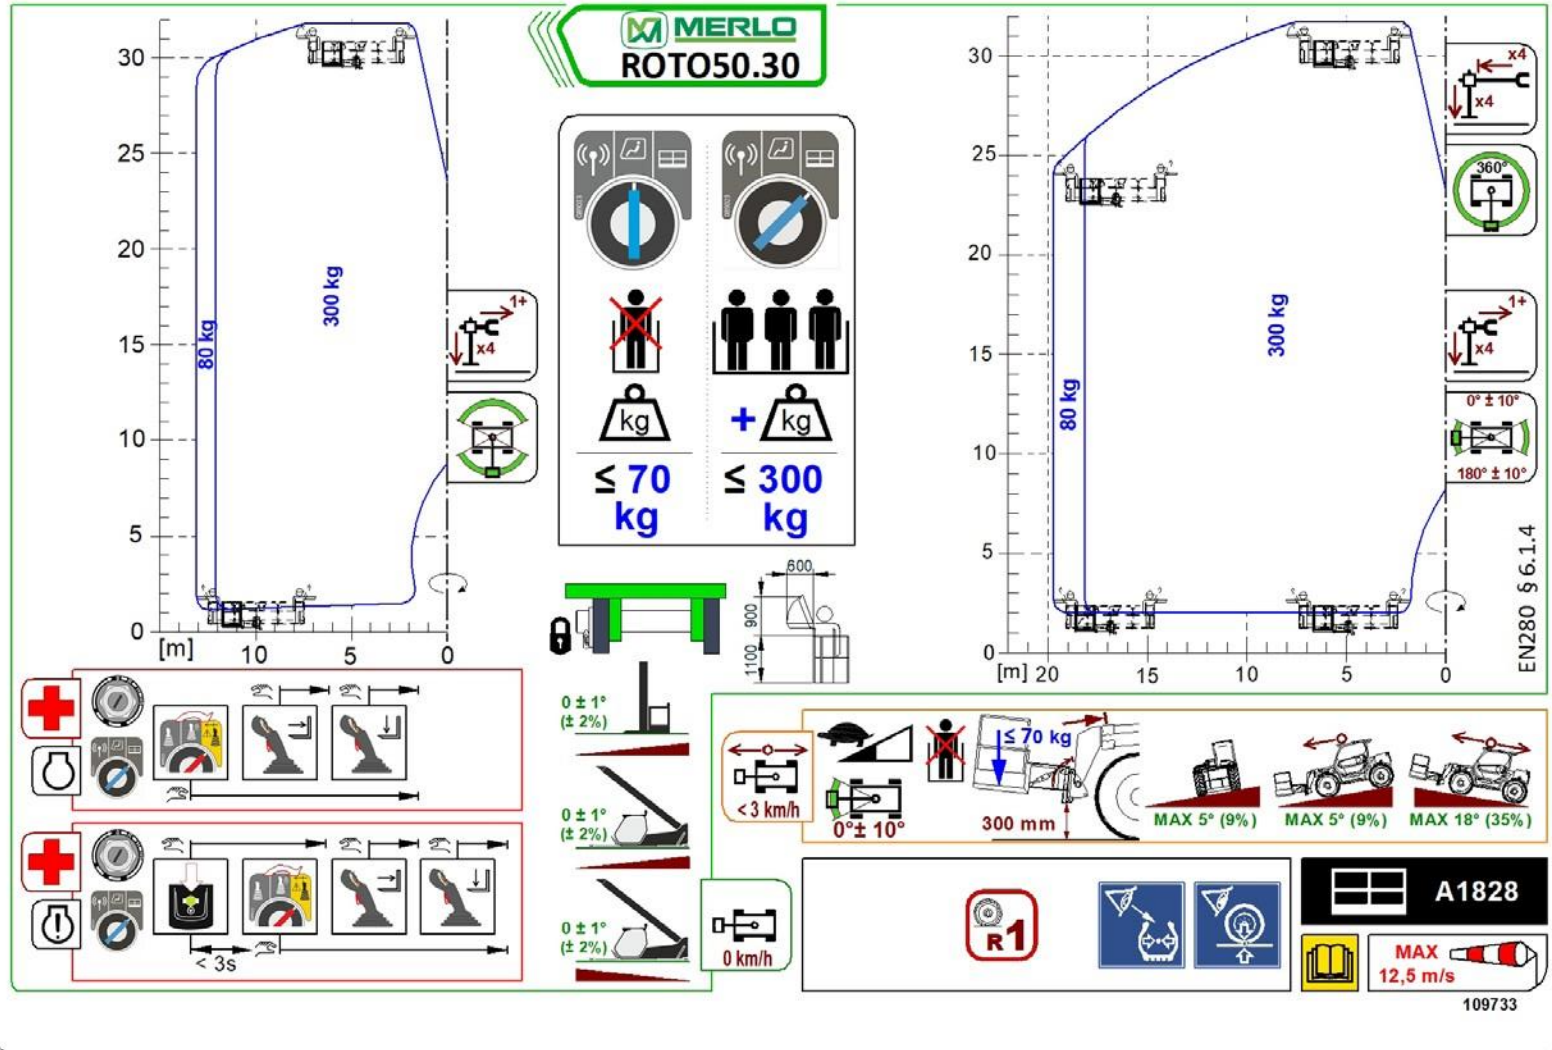

LUM00375-B [M2B-R5030-EU-01]

MERLO ROTO50.30

200 kg

30.2 m

≤ 70 kg

≤ 200 kg

0 ± 1° (± 2%)

0 ± 1° (± 2%)

0 ± 1° (± 2%)

0 km/h

35

80 kg

360°

0° ± 10°

180° ± 10°

EN280 § 6.1.4

MAX 5° (9%)

MAX 5° (9%)

MAX 18° (35%)

A1873

MAX 12,5 m/s

109734

0 ± 1° (± 2%)

0 ± 1° (± 2%)

0 ± 1° (± 2%)

0 km/h

300 mm

0° ± 10°

MAX 5° (9%)


MAX 5° (9%)

MAX 18° (35%)


5 - 12



M2B

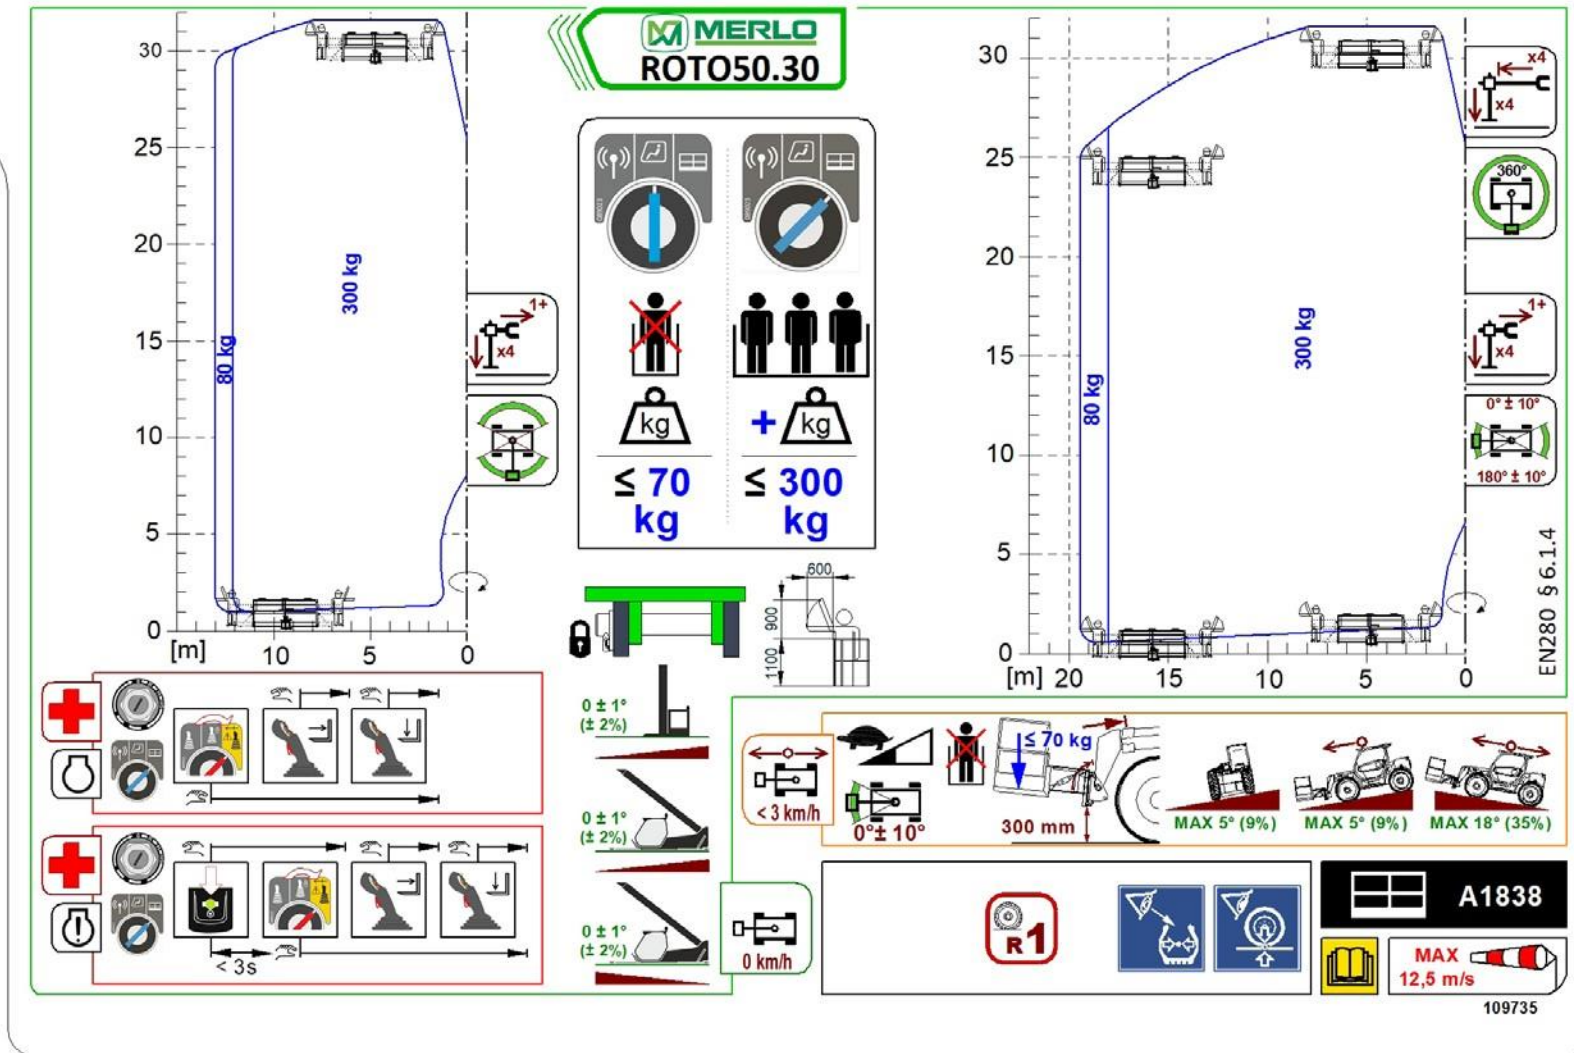


LUM00375-B [M2B-R5030-EU-01]

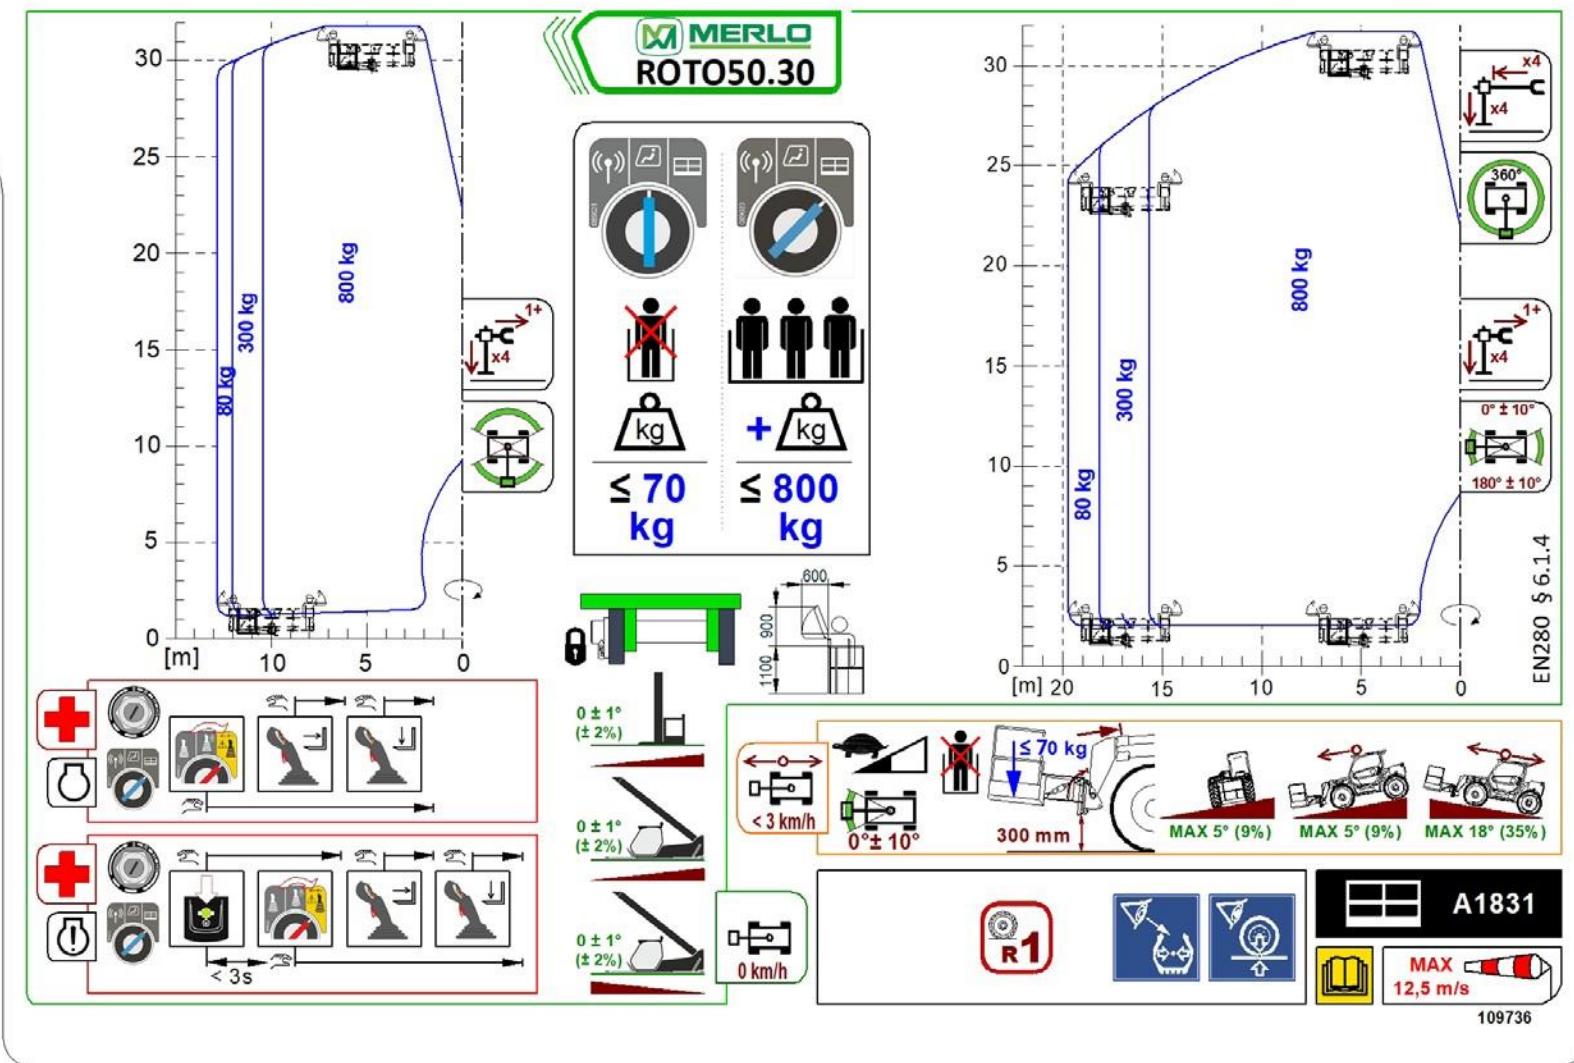

7 - 12




M2B

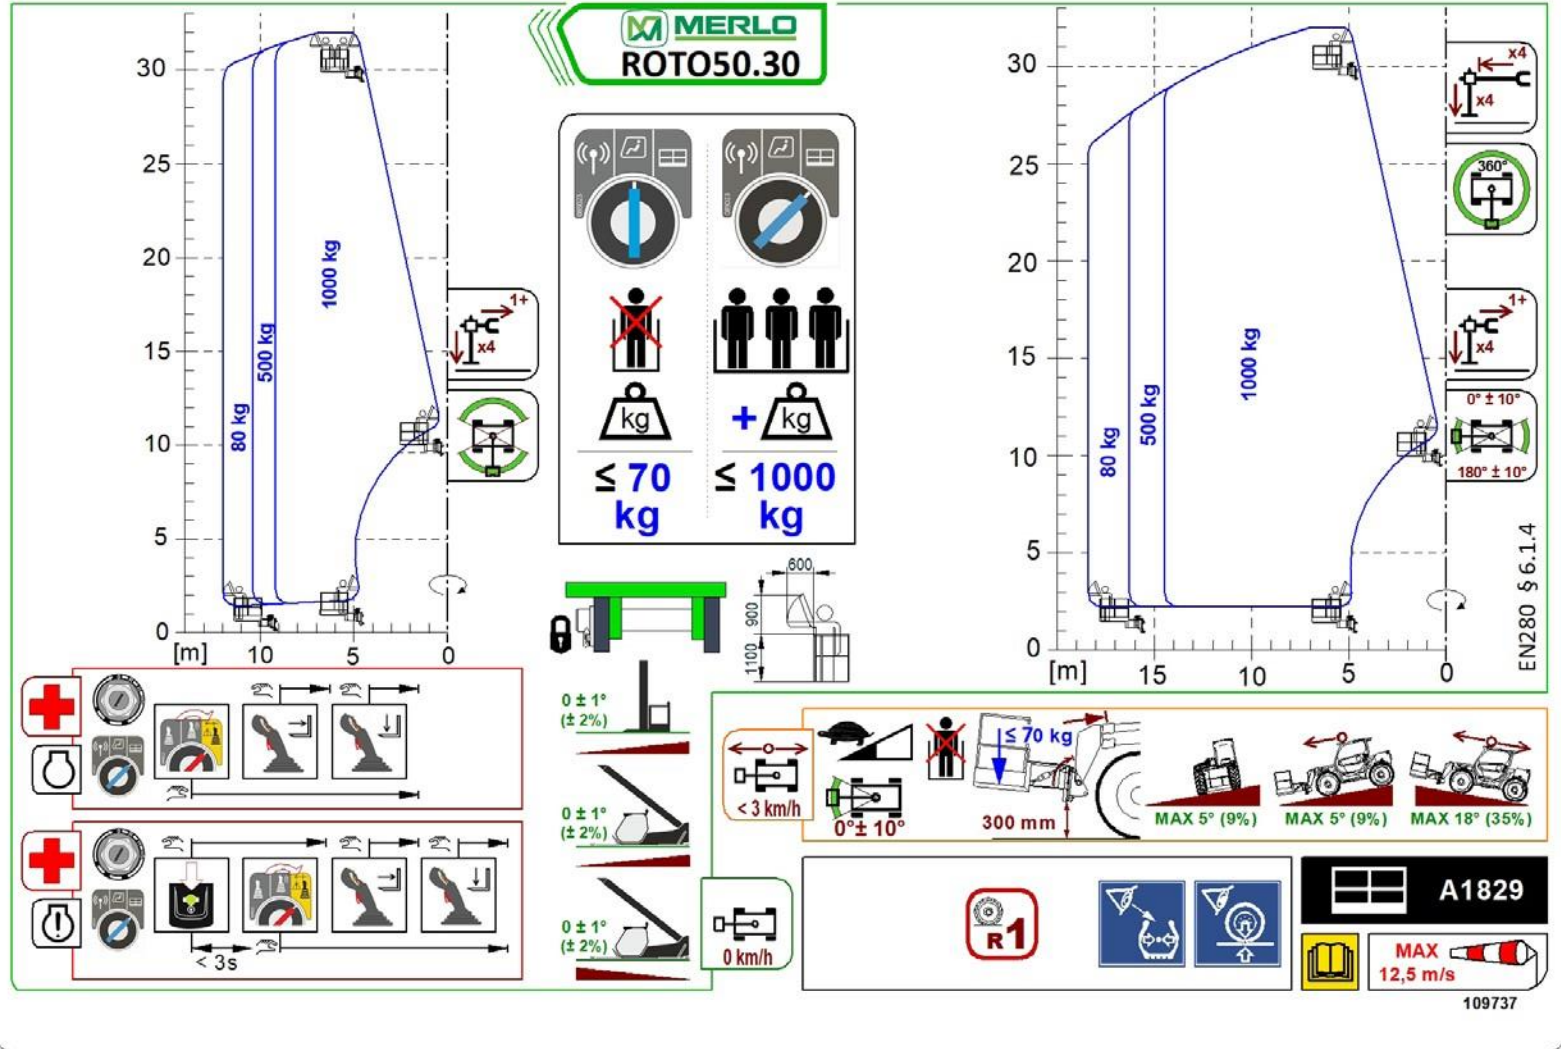

LUM00375-B [M2B-R5030-EU-01]

9 - 12

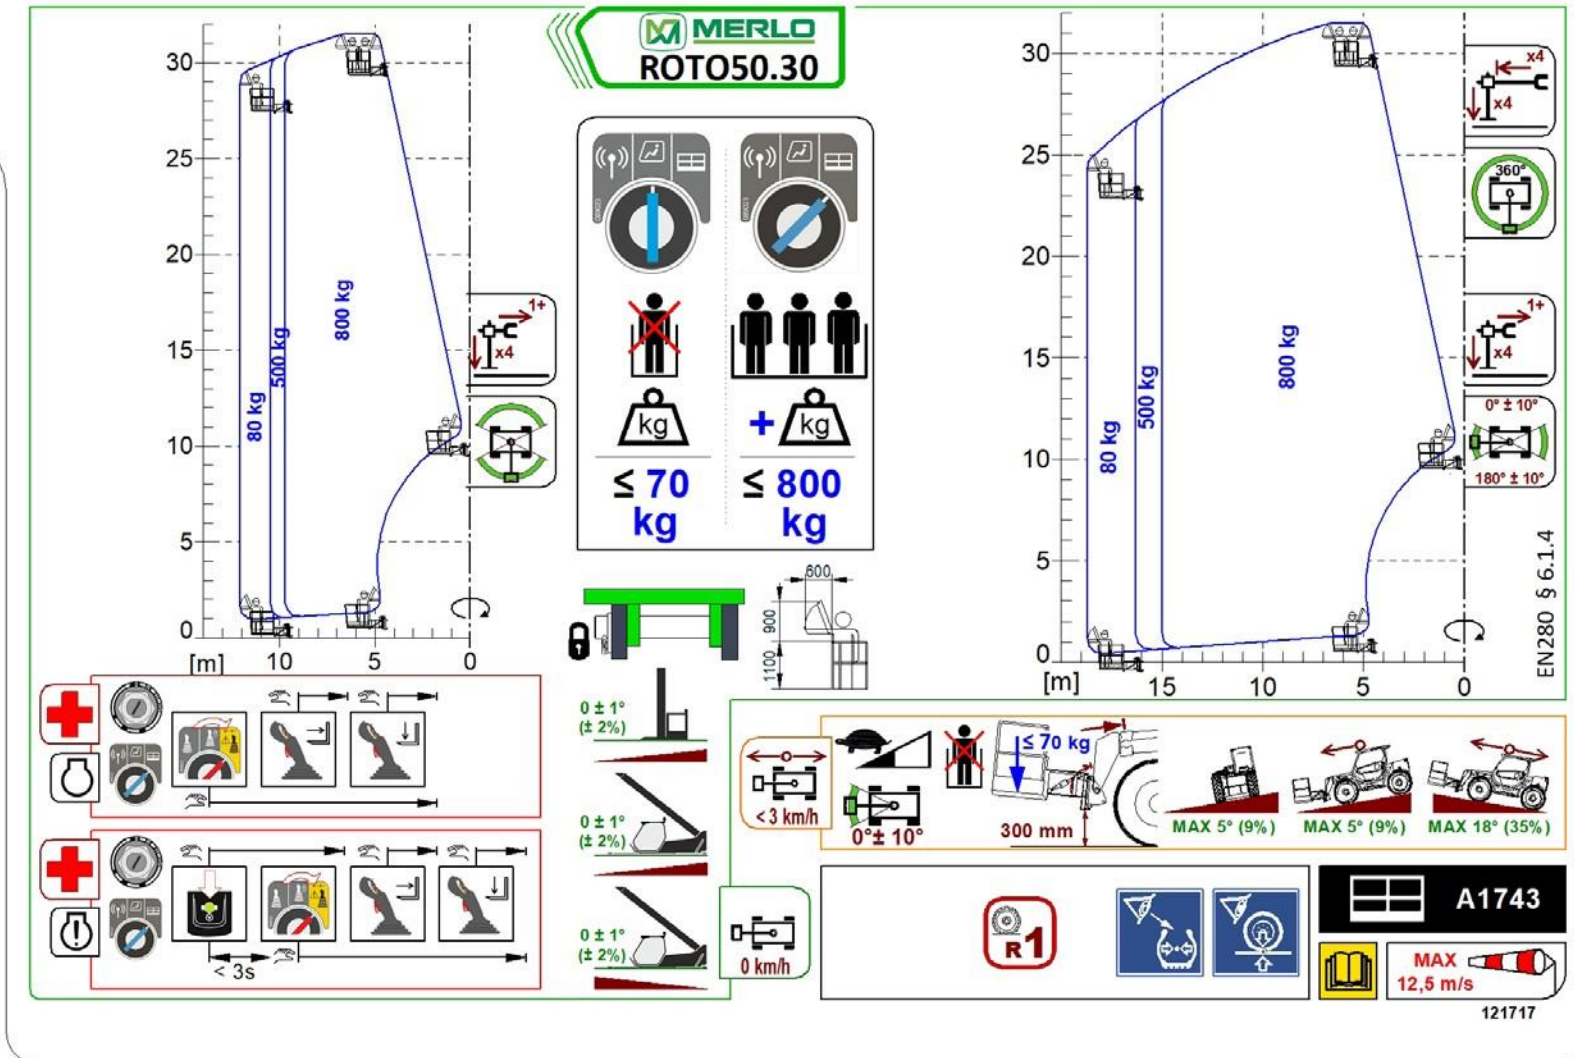

M2B

